


Português
01/2024



LOYTEC Facts+

Innovative Building Automation – Product Solutions

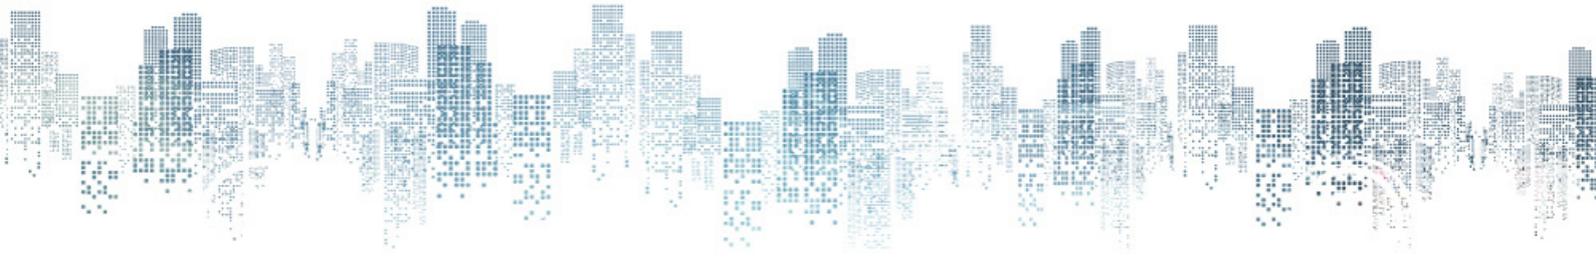

Member of:



BACnet
INTEREST GROUP EUROPE

BACnet
INTERNATIONAL

enocean alliance
Member


KNX

STANDARD
MOTOR INTERFACE

European
Building
Automation
Association


Digital Illumination
Interface Alliance

Visão Geral dos produtos LOYTEC

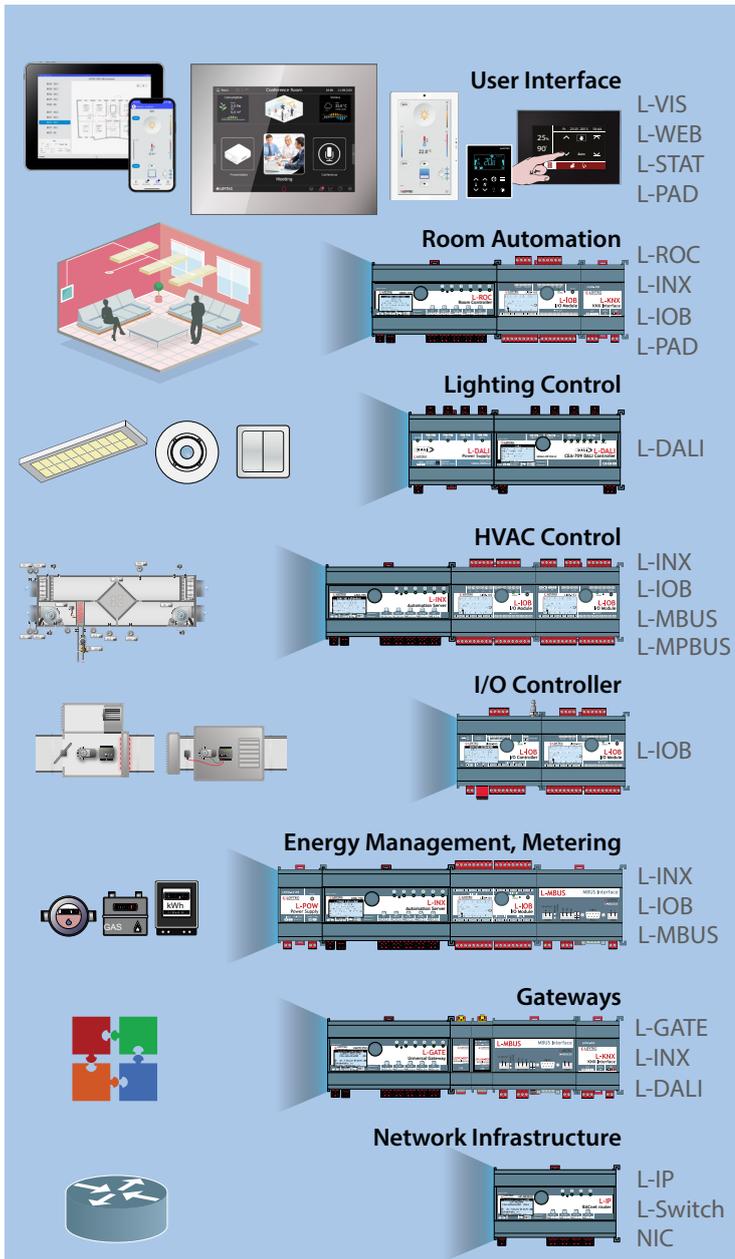

| | LON | BACnet | KNX | EnOcean | Bluetooth | DALI | SMI | Modbus | M-Bus | MP-Bus | OPC | Programmable | IoT |
|-----------------------------|-----|--------|-----|---------|-----------|------|-----|--------|-------|--------|-----|--------------|-----|
| User Interface | ✓ | ✓ | | | ✓ | | | ✓ | | | ✓ | ✓ | ✓ |
| Room Automation | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Lighting Control | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ |
| HVAC Control | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| I/O Controller | ✓ | ✓ | | ✓ | | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ |
| Energy Management, Metering | ✓ | ✓ | ✓ | ✓ | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Gateways | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| Network Infrastructure | ✓ | ✓ | | | | | | | | | ✓ | | |

Sistema L-WEB


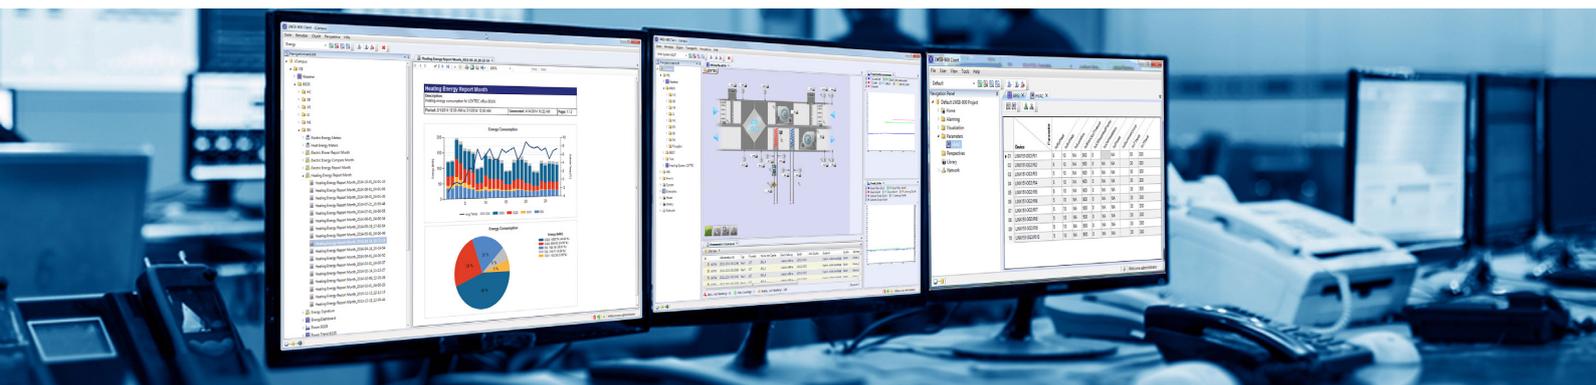


O sistema L-WEB é uma plataforma BMS poderosa para gerir sistemas de automação em edifícios de qualquer dimensão. Consegue-se a máxima flexibilidade e escalabilidade através de uma arquitetura cliente/servidor do LWEB-900 em combinação com os controladores LOYTEC L-INX Automation Servers e L-ROC Room Controllers.

O sistema L-WEB serve para:

- Visualizar páginas gráficas personalizadas com conteúdo dinâmico em qualquer web browser,
- Análise e armazenamento de dados de longo prazo,
- Gerir horários distribuídos,
- Gerir alarmes,
- Organizar qualquer tipo de parâmetros de sistema e set points,
- Gerir dispositivos LOYTEC ainda que de forma remota,
- Criação de relatórios, nomeadamente, para consumo de energia de um edifício.
- Integração de webcams
- Funcionalidade para múltiplos locais
- VPN

Encontram-se disponíveis visualizações individuais de tarefas específicas para diferentes utilizadores via LWEB-803 dashboards, interface LWEB-802 HTML5, ou através do sistema de gestão de edifícios (BMS) LWEB-900. Múltiplos utilizadores podem usar simultaneamente as funções do sistema em diferentes PC's. O L-WEB providencia um conjunto alargado de funções para gestão de utilizadores e rastreamento de ativos. Alarmes, horários e tendências (AST™) nos dispositivos LOYTEC L-INX, L-ROC, L-VIS, L-DALI, L-IOB I/Ou, LIOB-AIR e L-GATE são automaticamente sincronizados no servidor L-WEB.

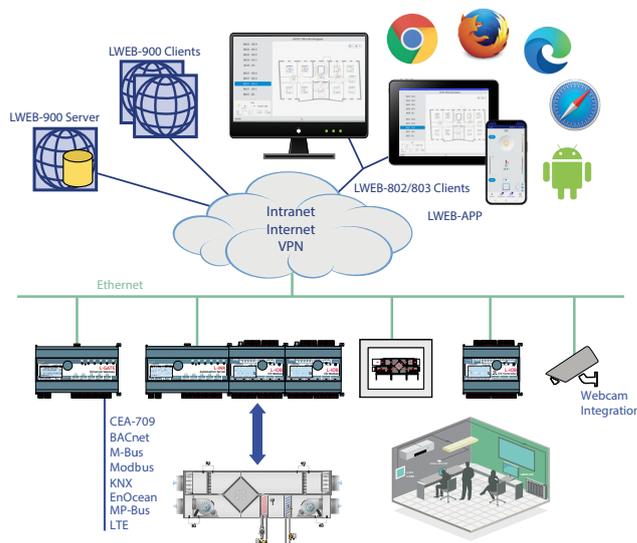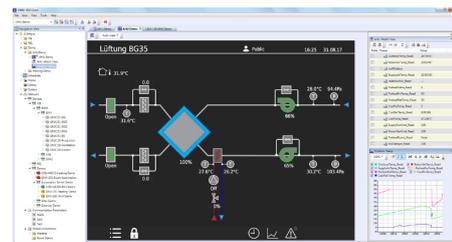


As funções AST™ estão sempre disponíveis em sistema de gestão técnica de edifícios e completamente integradas no sistema L-WEB.

Produtos de conectividade


O LGATE-902 e LGATE-952 são poderosos gateways universais que pode hospedar páginas gráficas específicas do usuário a serem usadas com LWEB 802/803. Eles podem simultaneamente integrar e mapear pontos de dados de vários protocolos abertos. Operação local e sobreposição é fornecida pelo "jog dial" incorporado e pela tela retroiluminada (128x64 pixels). Informações sobre dispositivo e ponto de dados é fornecida pela interface Web e apresentada no display via símbolos ou em formato de texto.

Os Routers LIP-ME201C, LIP-ME202C e LIP-ME204C BACnet/IP conectam BACnet MS/TP a uma rede BACnet/IP. Os routers BACnet são compatíveis com os Standards ASHRAE 135-2012 e ISO 16484-5:2012. Os routers podem ser configurados para atuar como um dispositivo de gerenciamento de difusão BACnet (BBMD). Os routers L-IP BACnet/IP também fornecem suporte de dispositivos externos.

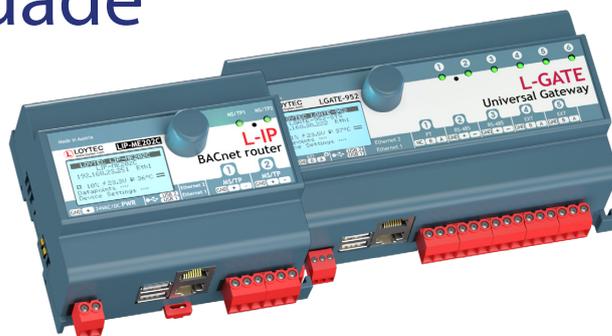

Os routers L-IP LIP 1ECTC, LIP 3ECTC, LIP 33ECTC e O LIP 3333ECTC conecta via canais de par trançado (TP/FT10 ou TP/XF 1250) com o canal Ethernet/IP (IP 852) Sistemas LonMark. O L-IP roteia pacotes CEA 709 através rede baseadas em IP como LAN (Ethernet), Intranet ou até mesmo Internet.

L-INX Automation Servers

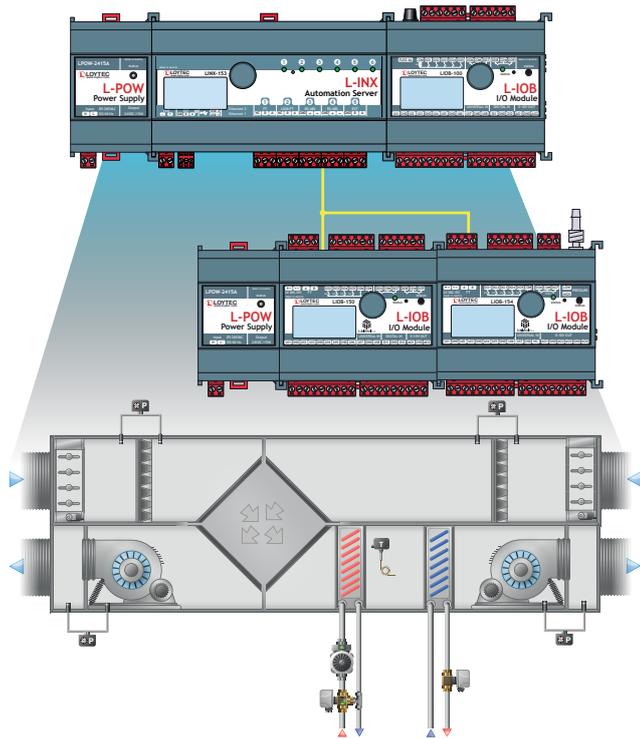

Os L-INX Automation Servers são dispositivos poderosos, livremente programáveis, multiprotocolo e que podem ser expandidos por módulos L-IOB I/O plug & play. O LINX Automation Server inclui as funções de alarmes, horários, tendências (AST™) e e-mail, para além de alojarem páginas dinâmicas que podem ser visualizadas através de qualquer web browser.

Protocolos suportados:

| Protocolos de Campo | Protocolos IP |
|---------------------|--------------------|
| BACnet MS/TP | BACnet/IP |
| LONMARK TP/FT-10 | LONMARK IP-852 |
| KNX TP1 | KNXnet/IP |
| M-Bus | OPC XML-DA, OPC UA |
| Modbus RTU | Modbus TCP |
| EnOcean | HTTPS |
| SMI | SMTP |
| MP-Bus | SNMP |
| | Node.js |
| | LTE |

Os módulos L-IOB I/O podem ser ligados aos L-INX Automation Servers através de LIOB-Connect, LIOB-FT, e LIOB-IP. Os L-INX integram-se de maneira fácil no sistema LWEB via Web Services. O sistema foi concebido com características de segurança de rede, tais como, SSL, HTTPS, SSH, e o firewall, autorizando o intercâmbio de dados com os L-INX Automation Servers de forma segura, impedindo os acessos não autorizados. Os L-INX Automation Servers podem-se conectar a SMI, MP-Bus, EnOcean e WLAN através de interfaces adicionais.

Controladores e Módulos L-IOB I/O

Os controladores L-IOB e os módulos L-IOB, livremente programáveis, têm várias configurações I/O, estão baseados em 32-bit L-CORE, assegurando recursos e funcionalidade de primeira categoria. Alguns modelos estão equipados com sensor de pressão.

Os controladores e módulos L-IOB I/O estão disponíveis com conectividade BACnet/IP ou LonMark IP-852 Ethernet, bem como LonMark TP/FT-10. Os dispositivos L-IOB I/O comunicam-se de forma independente através de variáveis de rede ou objetos BACnet nas redes correspondentes. Além disso, os módulos L-IOB estão disponíveis com interface LIOB-Connect para uma fácil e rápida ligação ao L-INX Automation Servers e, ao L-ROC Room Automation.

Todos os dispositivos L-IOB incluem um ecrã de 128 x 64 com backlight. O ecrã mostra informação do dispositivo e data points. Um seletor rotativo permite a operação local do dispositivo, possibilitando a navegação através de informação detalhada no ecrã e operação e controlo de data points.

Todos os controladores L-IOB I/O incluem funcionalidades de alarmes e horários. Os controladores L-IOB I/O baseados em IP incluem tendências e notificações via e-mail. Eles podem também alojar páginas dinâmicas acessíveis através de Web Browser. As I/O universais estão disponíveis em LIOB-110, LIOB-112, LIOB-590, LIOB-592, LIOB-593, LIOB-594, LIOB-595, e LIOB-596.



Os Controladores LIOB-AIR são controladores de volume de ar variável (VAV) totalmente baseados em IP com um programa de aplicação predefinido, flexível, reprogramável e funções de gestão sofisticadas para um sistema de ventilação de edifícios.


L-ROC Room Automation

O controlador L-ROC é a base para um revolucionário sistema de automação baseado em IP que permite a mudança de layout em segundos. L-ROC integra facilmente de forma nativa, no nível de controlador, sistemas BACnet/IP e LonMark.


O software L-STUDIO permite criar e ajustar aplicativos de Room Automation flexíveis incorporando o AVAC, iluminação, estores, e funcionalidades de segurança num sistema de automação integral com muito pouco esforço.

Uma parte integral da solução L-ROC é a operação sustentada em ambiente Web desde PCs ou dispositivos móveis (iOS e Android) via LWEB-803 dashboards (aplicação virtual em PC), ou páginas LWEB-802 HTML5, apresentando de forma automática projetos gráficos para operação local em Consolas Touch L-VIS.

A família de produtos L-ROC Room Controller integra os sub-sistemas DALI-2, KNX, LON, BACnet, MS/TP, Modbus, SMI, M-Bus, MP-Bus e EnOcean ao nível do controlador. Essas capacidades de integração, são a base para uma escalabilidade e flexibilidade excepcionais.

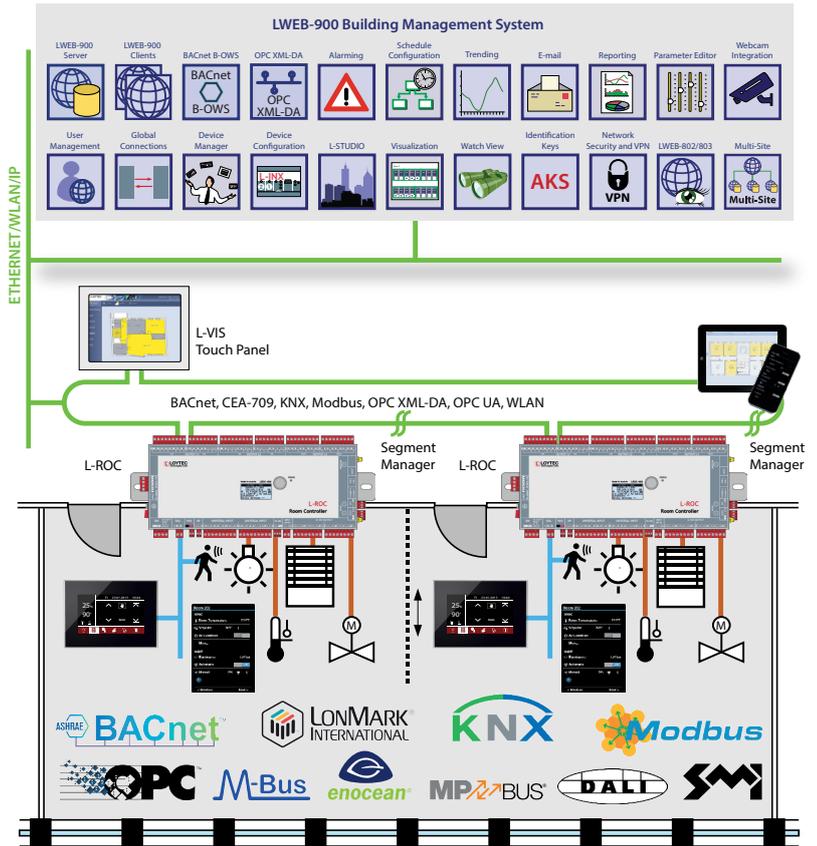

Controlador de Iluminação L-DALI

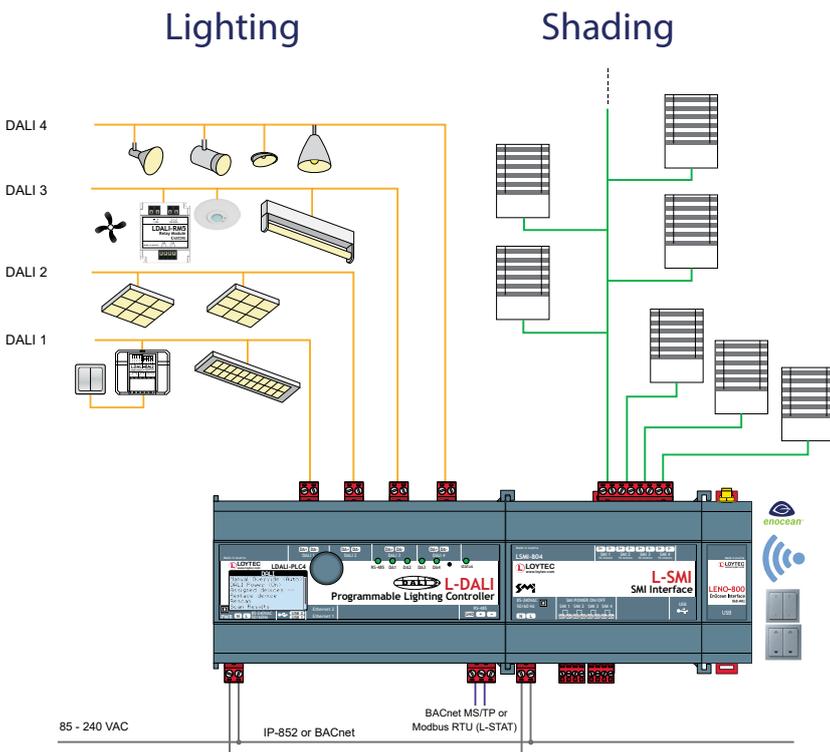

Os Controladores L-DALI são dispositivos multifuncionais certificados DALI-2 com controlo de iluminação DALI e funcionalidade de gateway entre o protocolo DALI (Digital Addressable Lighting Interface) e os Sistemas LonMark ou Redes BACnet. Além da integração de balastros DALI e dispositivos de entrada certificados DALI-2, os controladores L-DALI suportam a configuração de uma variedade de dispositivos L-DALI (módulos conversores de relé e DALI para 1-10V, dimmers de corte de fase, módulos PWM, acopladores de botão e multi-sensores).

O servidor web integrado permite a configuração do dispositivo, a configuração e a manutenção do sistema DALI. Os controladores L-DALI apresentam funcionalidades alarmantes, programação, tendências (AST™), funcionalidade de notificação por e-mail e, juntamente com a nova geração de multi-sensores L-DALI com bluetooth-enabled, funcionalidade de seguimento de activos e configuração de farol de sensores.

Os controladores L-DALI suportam DALI-2. Estes podem integrar dispositivos EnOcean que juntamente com a interface LSMI-804, podem criar uma inteligente e eficiente proteção do sol e anti-reflexo através do controlo ativo e ajuste de lâminas, de acordo com a posição do sol.

LPAD-7 Painéis Tácteis de Operador



Uma câmara opcional incorporada de 1,3 Mpx com 80° de ângulo de visualização transmite vídeos da área monitorizada.

A conectividade IP é via portas ethernet no dispositivo que suporta PoE, configuração de rede em ponte ou separada, para além de WLAN sem fios. O LPAD-7 pode comunicar com dispositivos de malha Bluetooth ou Bluetooth numa determinada área.

LPAD-7 implementa os protocolos abertos mais populares, tais como BACnet, Bluetooth, Modbus, OPC XML/DA, OPC UA, EnOcean, LonMark IP852 e FT.

Os Painéis Tácteis de Operador LPAD-7 funcionam perfeitamente como painéis de operador de sala, termóstatos de rede ou controladores programáveis genéricos com ecrã táctil capacitivo e uma variedade de sensores integrados. O LPAD-7 adapta-se perfeitamente aos requisitos para operar em espaços comerciais ou residenciais de qualquer tipo.

O LPAD-7 oferece um design moderno e fino para montagem em parede.

O LPAD-7 é capaz de detectar temperatura, humidade, luminosidade e presença. Os Socket de montagem opcional, acrescentam uma variedade de capacidades de conectividade adicionais e um número de entradas e saídas físicas, quando necessário.

O receptor infravermelho detecta comandos a partir de um controlo remoto infravermelho. O sensor de proximidade acende a retroiluminação do visor e a distância de detecção pode ser definida (entre 20-200 cm).



L-STAT Room Operator Panels



O L-STAT é um dispositivo de controlo com design moderno e minimalista que satisfaz em qualquer tipo de decoração de interiores, é ligado diretamente a controladores LOYTEC com interface Modbus.

Podem ser ligados até 16 dispositivos L-STAT a um controlador. O L-STAT está equipado com um ecrã de LCD com RGB backlight com cor ajustável, oferecendo uma configuração para conseguir que o L-STAT harmonize com o conceito de cor interior de qualquer edifício. Oito botões capacitivos são utilizados para ajustar os valores de set points. Ainda podem-se ligar quatro botões externos. Dependendo da versão, os sensores internos do L-STAT medem temperatura, humidade, ponto de orvalho, iluminação de ambiente, ocupação e o nível de CO2 do ar. Também, são mostrados no ecrã LCD a data e o tempo, bem como o nível atual de otimização de energia.

Dispõe de um bescuro com retroalimentação acústica dos botões touch e pode ser também usado para indicar alarmes e estados de falhas. Para prevenir alterações não autorizadas, dispõe de dois níveis de acesso (utilizador e integrador de sistemas). Além disso o L-STAT inclui um recetor de infravermelhos (NFC) para um controlo remoto confortável.

Adicionalmente, eles podem ser equipados com uma interface EnOcean. Nesse caso, o L-STAT atua como um transceptor EnOcean remoto para todos os controladores que suportam uma interface L-STAT.



Consolas Touch L-VIS

As consolas touch L-VIS são idealmente adequados para a visualização e operação de vários aplicativos em automação de edifícios. Nas consolas touch L-VIS visualizam-se sistemas de automação de edifícios, podem ser utilizados como unidades de controlo em quadros elétricos ou para salas de conferências e áreas de receção.

L-VIS tem um impressionante desenho contemporâneo, integra-se de forma harmônica em arquitetura moderna e histórica, além de ser extremamente amigável com o utilizador. A sua pouca profundidade de montagem e baixa perda de calor permite a sua montagem em quase qualquer lugar.

Para a operação e monitorização de informação em sistemas LonMark, redes BACnet ou Modbus, estão disponíveis os seguintes tipos de consolas touch:

- 7" L-VIS Consola touch, 800 x 480, 262 144 cores, marco frontal de vidro e toque capacitivo
- 12.1" L-VIS Consola Touch, 800 x 600, 262 144 cores, marco frontal de alumínio com acabamento anodizado
- 15" L-VIS Consola Touch, 1024 x 768, 262 144 cores, marco frontal de alumínio com acabamento anodizado ou marco frontal de vidro e toque capacitivo.



Integração IoT





A Internet das Coisas permitiu o nascimento de dispositivos com interfaces baseadas na Web, como projetores multimédia, sistemas A/V, TVs inteligentes ou lâmpadas inteligentes. A inovadora integração de IoT baseada em JavaScript da LOYTEC permite integrar todos eles com os nossos produtos.

Aplicações típicas são salas de reuniões ou auditórios com controlo de cena de iluminação e estores, integração de dispositivos de terceiros e operação de equipamentos multimédia com apenas o toque de um único botão. Produtos similares do setor de consumo, como um sistema de áudio Sonos®, luzes Philips Hue ou Alexa e restantes, podem ser conectados ao Sistema de Controlo de edifícios LOYTEC.

A função IoT (Node.js) permite conectar o sistema a praticamente qualquer serviço Cloud, tanto para fazer upload de dados históricos para serviços de análise como para enviar mensagens de alarme para serviços de processamento de alarmes ou partes operacionais do sistema de controlo em um serviço Cloud (por exemplo, programação baseada em calendários Web ou sistemas de reservas).

É possível processar informações da Internet como dados meteorológicos baseado no controlo de previsão. Finalmente, o kernel do JavaScript também permite implementar protocolos em série para equipamentos não-padrão no controlo primário da planta.

Resumindo: tudo o que é possível controlar com uma aplicação, é também possível integrar em Sistemas de Edifícios ou numa interface de um painel tátil.

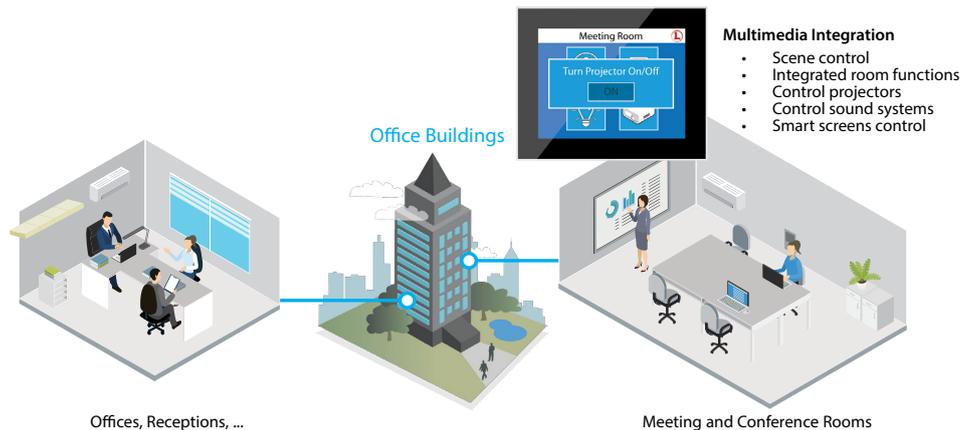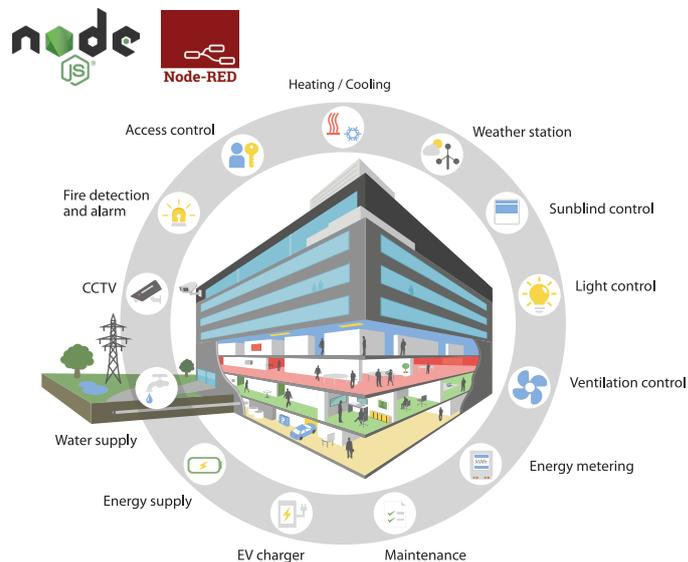

| Product name | L-WEB Building Management Software | | | |
|------------------------------|---|---|---|---|
| Model | LWEB-900 | LWEB-900-MAX | LWEB-803 | LWEB-802 |
| |  | |  |  |
| Product description | Building Management Software for 10 devices (L-IP Router and L-IOB-I/O Modules connected as extension to the L-INX Automation Servers, L-ROC Room Controllers and L-IOB I/O Controllers do not consume a device license), licenses for 5 LWEB-900 clients and 20 LWEB-80x clients are included, no installation license for end customers | Building management software for an unlimited number of devices, Building Management Software for an unlimited number of devices, licenses for 5 LWEB-900 clients and 20 LWEB-80x clients are included, no installation license for end customers | Graphical user interface, visualization on Windows PC | Graphical user interface via web browser, compatible to Android and iOS |
| Hardware requirements | LWEB-900 server: PC with at least 2 GHz, 32- or 64-bit processor, 4 GB RAM, 50 GB free hard disk space, Ethernet connection LWEB-900 client: PC with at least 2 GHz, 32- or 64-bit processor, 2 GB RAM, 1 GB free hard disk space, Ethernet connection, screen resolution 1280x720 | | | |
| Operating system | Windows 10, Windows 11, Windows Server 2012, Windows Server 2016, Windows Server 2019 | | | - |
| Visualization and operation | ■ | ■ | ■ | ■ |
| Graphical view | ■ | ■ | ■ | ■ |
| Alarming | ■ | ■ | ■ | ■ |
| Scheduling | ■ | ■ | ■ | ■ |
| Trending | ■ | ■ | ■ | ■ |
| Event log | ■ | ■ | - | - |
| Parameter view | ■ | ■ | - | - |
| Global connections | ■ | ■ | - | - |
| Device manager | ■ | ■ | - | - |
| Device configuration | ■ | ■ | - | - |
| Multiuser system | ■ | ■ | ■ | ■ |
| Reporting | ■ | ■ | - | - |
| Watch view | ■ | ■ | - | - |
| AKS-Identification keys | ■ | ■ | - | - |
| Webcam integration | ■ | ■ | - | - |
| Scripting | ■ | ■ | - | - |
| Recommended limit for SQLite | 10 GBytes, 1 record =100 bytes -> 100.000.000 records | | | - |
| Max. number of devices | 1000 | | - | - |
| Max. number of multi-sites | 50 | | - | - |

| Product name | L-WEB Building Management Add-on licenses | |
|-------------------|--|--|
| Add-on licenses | Description | |
| LWEB-900-ADD-10 | Add-on license for 10 additional devices | |
| LWEB-900-ADD-MAX | Add-on license for max. 1000 devices | |
| LWEB-900-CL-5 | Add-on license for additional 5 LWEB-900 clients | |
| LWEB-900-80x-50 | Add-on license for additional 50 LWEB-80x clients | |
| LWEB-900-80x-100 | Add-on license for additional 100 LWEB-80x clients | |
| LWEB-900-80x-MAX | Add-on license for an unlimited number of LWEB-80x clients | |
| LWEB-900-MS | Add-on license to enable multi-site support | |
| LWEB-900-VPN-BASE | Add-on license to enable VPN support in LWEB-900 for one project, includes LWEB-900-VPN-MNT for 1 year | |
| LWEB-900-VPN-MNT | Add-on license to add/remove VPN clients in LWEB-900 for all projects. Valid for 1 year. | |

| Product name | L-INX Automation Servers | | |
|---|--|---|---|
| Model | LINX-153 | LINX-154 | LINX-215 |
| |  |  |  |
| BACnet device profile | B-BC | | |
| Power supply | 24 VDC / 24 VAC ± 10%, typ. 2.5 W | | |
| CPU | Quad-core ARM Cortex-A53 @ 1.1GHz | | |
| RAM | 1 GByte | 1 GByte | 1 GByte |
| FLASH | 8 GByte | 8 GByte | 8 GByte |
| TP / FT-10 ports | 1 | - | 1 |
| LIOB-FT ports | 1 | - | 1 |
| RS-485 ports | 2 | 4 | 1 |
| Extension port (KNX) | 1 | 1 | 1 |
| Extension / Serial port (M-Bus) | | | |
| Total number of data points | 30000 | | 10000 |
| OPC data points | 10000 | | 5000 |
| BACnet objects | 2000 | | 1000 |
| BACnet calendar | 25 | | 25 |
| BACnet scheduler | 100 | | 100 |
| BACnet notification classes | 32 | | 32 |
| Trend logs | 512 (13 000 000 entries, ≈ 200 MB) | | 512 (13 000 000 entries, ≈ 200 MB) |
| LonMark calendar | 1 (25 calendar patterns) | | 1 (25 calendar patterns) |
| LonMark scheduler | 100 | | 100 |
| LonMark alarm servers | 1 | | 1 |
| Modbus data points | 2000 | 5000 | 2000 |
| L-WEB clients | 32 | | 32 |
| L-IOB I/O modules | Up to 24 L-IOB I/O Modules in any combination of type LIOB-Connect, LIOB-FT, LIOB-IP852/BIP | | Up to 8 L-IOB I/O Modules in any combination of type LIOB-Connect, LIOB-FT, LIOB-IP852 |
| IEC-61131-3 | ■ | ■ | ■ |
| IEC-61499 | ■ | ■ | ■ |
| CEA-709 Router | ■ | - | ■ |
| CEA-709 RNI | ■ | - | ■ |
| CEA-709 (FT) | ■ 1 | ■ | ■ 1 |
| CEA-852 (IP) | ■ 1 | ■ | ■ 1 |
| BACnet Router | - | ■ | ■ |
| BACnet MS / TP | ■ 2 | ■ | ■ 2 |
| BACnet TCP / IP | ■ 2 | ■ | ■ 2 |
| BBMD | - | ■ | - |
| Modbus RTU/ASCII | ■ 3 | ■ 3 | ■ 3 |
| Modbus TCP / IP | ■ | ■ | ■ |
| M-Bus | ■ 4 | - | ■ 4 |
| MP-Bus | ■ 5 | - | ■ 5 |
| SMI | ■ 5 | - | ■ 5 |
| KNX TP1 | ■ 4 | - | ■ 4 |
| KNX IP | ■ | - | ■ |
| EnOcean | ■ 5 | - | ■ 5 |
| OPC XML-DA | ■ | ■ | ■ |
| OPC UA | ■ | ■ | ■ |
| SNMP | ■ | ■ | ■ |
| LIOB-Connect | ■ | ■ | ■ |
| LIOB FT + IP | ■ | ■ | ■ |
| 128 x 64 graphic display with backlight | ■ | ■ | ■ |
| USB | ■ | ■ | ■ |
| Ethernet switch | ■ | ■ | ■ |
| WLAN | ■ 5 | ■ 5 | ■ 5 |
| LTE | ■ 5 | ■ 5 | ■ 5 |
| IoT | ■ | ■ | ■ |
| L-STUDIO | ■ | ■ | ■ |
| SSH, HTTPS, Firewall | ■ | ■ | ■ |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | |
| Dimensions (L x W x H, mm) | 159 x 100 x 75 | | 107 x 100 x 75 |
| Certificates | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL |

1. This model can be configured to have either FT or IP active for CEA-709.

2. This model can be configured to have either MS / TP or IP active for BACnet.

3. Modbus RTU/ASCII can only be used if BACnet MS / TP is not active on the same port.

4. M-Bus and KNX TP1 can be used alternatively only on this model. An expansion module is needed and must be ordered separately.

5. To operate these protocols, an expansion module is needed and must be ordered separately.

| Product name | L-ROC Room Controller | | | |
|---|--|---|---|---|
| | LROC-102 | LROC-400 | LROC-401 | LROC-402 |
| Model |  |  |  |  |
| Power supply | 24 VDC / 24 VAC ±10%, typ. 2.5 W | 24 VDC or 85 – 240 VAC, 50 – 60 Hz (both supplies can be redundantly fed, do not connect 24VDC if SMI or DALI are used) | | |
| CPU | Quad-core ARM Cortex-A53 @ 1.1GHz | | | |
| RAM | 1 GByte | 1 GByte | 1 GByte | 1 GByte |
| FLASH | 8 GByte | 8 GByte | 8 GByte | 8 GByte |
| TP / FT-10 ports | 1 | - | - | - |
| LIOB-FT ports | 1 | - | - | - |
| RS-485 ports ³ | 1 | 1 | 1 | - |
| Extension port (KNX) | 1 | 1 | 1 | 1 |
| Extension/Serial port (M-Bus) | 1 | 1 | 1 | - |
| Total number of data points | 30000 | 30000 | 30000 | 30000 |
| OPC data points | 10000 | 10000 | 10000 | 10000 |
| BACnet objects | 4000 | 4000 | 4000 | 4000 |
| BACnet calendar | 25 | 25 | 25 | 25 |
| BACnet scheduler | 100 | 100 | 100 | 100 |
| BACnet notification classes | 32 | 32 | 32 | 32 |
| Trend logs | 512 (13 000 000 entries, ≈ 200 MB) | | | |
| LonMark calendar | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) |
| LonMark scheduler | 100 | 100 | 100 | 100 |
| LonMark alarm servers | 1 | 1 | 1 | 1 |
| Modbus data points | 4000 | 2000 | 2000 | 2000 |
| L-WEB clients | 32 | 32 | 32 | 32 |
| L-IOB I/O modules | Up to 24 (L-IOB I/O Modules in any combination of type LIOB-Connect, LIOB-FT, and LIOB-IP852 / LIOB-BIP) | 2 x LIOB-45x or LIOB-55x | | |
| IEC-61131-3 | - | - | - | - |
| IEC-61499 | ■ | ■ | ■ | ■ |
| CEA-709 Router | ■ | ■ | ■ | - |
| CEA-709 RNI | - | - | - | - |
| CEA-709 (FT) | ■ | - | - | - |
| CEA-852 (IP) | ■ | ■ | ■ | ■ |
| BACnet Router | ■ | ■ | ■ | ■ |
| BACnet MS / TP | ■ | ■ | ■ | - |
| BACnet TCP / IP / SC | ■ | ■ | ■ | ■ |
| BBMD | ■ | ■ | ■ | ■ |
| Modbus RTU/ASCII | ■ ³ | ■ ³ | ■ ³ | - |
| Modbus TCP / IP | ■ | ■ | ■ | ■ |
| M-Bus | ■ ⁴ | ■ ⁵ | ■ ⁵ | - |
| KNX TP1 | ■ ⁴ | ■ | ■ | ■ |
| KNX IP | ■ | ■ | ■ | ■ |
| SMI | ■ ⁵ | ■ | ■ | ■ ⁵ |
| EnOcean | ■ ⁵ | ■ | ■ | ■ ⁵ |
| OPC XML-DA | ■ | ■ | ■ | ■ |
| OPC UA | ■ | ■ | ■ | ■ |
| SNMP | ■ | ■ | ■ | ■ |
| LIOB Connect | ■ | - | - | - |
| LIOB FT + IP | ■ | ■ (IP only) | ■ (IP only) | ■ (IP only) |
| 128 x 64 graphic display with backlight | ■ | ■ | ■ | ■ |
| microSD Card | - | - | - | - |
| USB | ■ | ■ | ■ | ■ |
| Ethernet switch | ■ | ■ | ■ | ■ |
| WLAN | ■ ⁵ | ■ ⁵ | ■ ⁵ | ■ ⁵ |
| LTE | ■ ⁵ | ■ ⁵ | ■ ⁵ | ■ ⁵ |
| IoT | ■ | ■ | ■ | ■ |
| L-STUDIO | ■ (IEC 61499 only) | ■ (IEC 61499 only) | ■ (IEC 61499 only) | ■ (IEC 61499 only) |
| SSH, HTTPS, Firewall | ■ | ■ | ■ | ■ |
| Operating conditions | 0 °C to 50°C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | 0 °C to 40 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | |
| Dimensions (L x W x H, mm) | 159 x 100 x 75 | 290 x 144 x 54 | 290 x 144 x 54 | 290 x 144 x 54 |
| Certificates | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL |

1. This model can be configured to have either FT or IP active for CEA-709.
2. This model can be configured to have either MS / TP or IP active for BACnet.
3. Modbus RTU/ASCII can only be used if BACnet MS / TP is not active on this model.

4. M-Bus and KNX TP1 can be used alternatively only on this model. An expansion module is needed and must be ordered separately.
5. To operate these protocols, an expansion module is needed and must be ordered separately.

| Product name | L-ROC Room Controller | | |
|--|---|--|---|
| Model | LROC-400 | LROC-401 | LROC-402 |
| |  |  |  |
| MP-Bus (actuator) | ■ | ■ | ■ |
| Universal Input (UI) | 10 | - | 10 |
| Digital Input (DI) | 2 | - | 2 |
| Analog Output (AO) | 8 | - | 8 |
| Digital Output (DO) | 32 (24 x Relay, 8 x TRIAC) Relay : 10 A TRIAC : 0.5 A @ 24-240 VAC | - | 32 (24 x Relay, 8 x TRIAC) Relay : 10 A TRIAC : 0.5 A @ 24-240 VAC |
| Max. number of Rooms /Segments | 8 | 16 | 8 |
| SMI devices (via built-in interface) | 1 x 16 | 1 x 16 | - |
| SMI devices via LSMI-800 | 1 x 16 | 1 x 16 | 1 x 16 |
| SMI devices via LSMI-804 | 4 x 16 | 4 x 16 | 4 x 16 |
| SMI devices maximum | 96 | 96 | 64 |
| EnOcean devices (via built-in interface) | 32 | 64 | - |
| EnOcean devices via LENO-80x | - | - | 32 |
| EnOcean devices (maximum) | 64 | 64 | 64 |
| EnOcean devices commissioning limit | 32 | 64 | 32 |
| L-STAT Room operator panels | 8 | 16 | 8 |
| DALI power supply | 1 (16 VDC,160 mA guaranteed supply current, 250 mA max. supply current) | 1 (16 VDC,160 mA guaranteed supply current, 250 mA max. supply current) | - |
| DALI devices | 64 | 64 | - |
| DALI groups | 16 | 16 | - |
| DALI sensors | 16 | 16 | - |
| DALI pushbuttons (LDALI-BM2) | 64 pushbutton coupler | 64 pushbutton coupler | - |
| MP-Bus devices (via built-in interface) | 1 x 8 (16 MPL) | 1 x 8 (16 MPL) | 1 x 8 (16 MPL) |
| MP-Bus devices via LMPBUS-804 | 4 x 8 (16 MPL) | 4 x 8 (16 MPL) | 4 x 8 (16 MPL) |
| MP-Bus devices (maximum) | 80 | 80 | 80 |

| Product name | L-IOB I/O Modules (LIOB-Connect) | | | | | |
|---------------------------------------|---|---|---|---|---|---|
| Model | LIOB-100 | LIOB-101 | LIOB-102 | LIOB-103 | LIOB-110 | LIOB-112 |
| |  |  |  |  |  |  |
| Power supply | 24 V DC / 24 V AC \pm 10 % via L-INX, L-ROC, LIOB-586/587/588/589, L-POW or LIOB-A2/A4 via LIOB-Connect | | | | | |
| Universal Input (UI) | 8 | 8 | 6 | 6 | - | - |
| Digital Input (DI) | 2 | 16 | - | - | - | - |
| Analog Output (AO) | 2 | - | 6 | 6 | - | - |
| Digital Output (DO) | 9 (5 x Relay 6A @ 250 VAC, 4 x TRIAC 0.5A @ 24–230 VAC) | - | 8 (Relay 6A @ 250 VAC) | 5 (Relay 16A @ 250 VAC) | - | - |
| Universal I/O (IO) | - | - | - | - | 20 | 40 ¹ |
| Connection | LIOB-Connect | LIOB-Connect | LIOB-Connect | LIOB-Connect | LIOB-Connect | LIOB-Connect |
| 128x64 graphic display with backlight | ■ | ■ | ■ | ■ | ■ | ■ |
| Ethernet switch | - | - | - | - | - | - |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | | | | |
| Dimensions (L x W x H, mm) | 107 x 100 x 75 | | | | | 159 x 100 x 75 |
| Certificates | CE, FCC, UL | CE, FCC, UL | CE, FCC, UL | CE, FCC, UL | CE, FCC | CE, FCC |

1. O29-O40 are internally connected to IO29-IO40 and provide 4-20 mA outputs in parallel to the 0-10 V outputs on IO29-IO40

| Product name | I/O Modules (LIOB LonMark TP / FT-10) | | | | | I/O Modules (LIOB LonMark IP-852) | | | | |
|---------------------------------------|---|---|---|---|---|--|---|---|---|---|
| Model | LIOB-150 | LIOB-151 | LIOB-152 | LIOB-153 | LIOB-154 | LIOB-450 | LIOB-451 | LIOB-452 | LIOB-453 | LIOB-454 |
| |  |  |  |  |  |  |  |  |  |  |
| Power supply | 24 VDC / VAC $\pm 10\%$ via L-POW, or with an external power supply | | | | | | | | | |
| Universal Input (UI) | 8 | 8 | 6 | 6 | 7 | 8 | 8 | 6 | 6 | 7 |
| Digital Input (DI) | 2 | 12 | - | - | - | 2 | 12 | - | - | - |
| Analog Output (AO) | 2 | - | 6 | 6 | 4 | 2 | - | 6 | 6 | 4 |
| Digital Output (DO) | 8 (4 x Relay 6A @ 250 VAC, 4 x TRIAC 0.5A @ 24–230 VAC) | - | 8 (Relay 6A @ 250 VAC) | 5 (4 x Relay 16A @ 250 VAC, 1 x Relay 6A @ 250 VAC) | 7 (5 x Relay 6A @ 250 VAC, 2 x TRIAC 0.5A @ 24–230 VAC) | 8 (4 x Relay 6A @ 250 VAC, 4 x TRIAC 0.5A @ 24–230 VAC) | - | 8 (Relay 6A @ 250 VAC) | 5 (4 x Relay 16A @ 250 VAC, 1 x Relay 6A @ 250 VAC) | 7 (5 x Relay 6A @ 250 VAC, 2 x TRIAC 0.5A @ 24–230 VAC) |
| Differential pressure sensor | - | - | - | - | ± 500 Pa | - | - | - | - | ± 500 Pa |
| Connection | Twisted pair | Twisted pair | Twisted pair | Twisted pair | Twisted pair | Ethernet | Ethernet | Ethernet | Ethernet | Ethernet |
| 128x64 graphic display with backlight | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Ethernet switch | - | - | - | - | - | ■ | ■ | ■ | ■ | ■ |
| Operating conditions | 0°C to 50°C, 10–90% RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | | | | | | | | |
| Dimensions (L x W x H, mm) | 107 x 100 x 75 | | | | | | | | | |
| Certificates | CE, FCC, LonMark, UL | | | | | | | | | |

| Product name | L-IOB I/O Modules (BACnet IP) | | | | | | |
|---------------------------------------|--|---|---|---|--|---|---|
| Model | LIOB-550 | LIOB-551 | LIOB-552 | LIOB-553 | LIOB-554 | LIOB-560 | LIOB-562 |
| |  |  |  |  |  |  |  |
| BACnet device profile | B-BC | | | | | | |
| Power supply | 24 VDC / VAC ±10 % via L-POW, or with an external power supply | | | | | 24 VDC / 24 VAC ±10 % | |
| Power consumption | 4.5 W (relays on) | 4.5 W | 4.5 W (relays on) | 4.5 W (relays on) | 4.5 W (relays on) | 4.5 W ² | 2.5 W + 0.5 W for each Oxx (max 6 W) ² |
| Universal I/O (IO) | - | - | - | - | - | 20 | 40 ¹ |
| Universal Input (UI) | 8 | 8 | 6 | 6 | 7 | - | - |
| Digital Input (DI) | 2 | 12 | - | - | - | - | - |
| Analog Output (AO) | 2 | - | 6 | 6 | 4 | - | - |
| Digital Output (DO) | 8 (4 x Relay 6A @ 250 VAC, 4 x TRIAC 0.5A @ 24–230 VAC) | - | 8 (Relay 6A @ 250 VAC) | 5 (4 x Relay 16A @ 250 VAC, 1 x Relay 6A @ 250 VAC) | 7 (5 x Relay 6A @ 250 VAC, 2 x TRIAC 0.5A @ 24–230 VAC) | - | - |
| Differential pressure sensor | - | - | - | - | ±500 Pa | - | - |
| OPC data points | 100 | | | | | | 200 |
| BACnet objects | 1 (Per I/O) | | | | | | |
| BACnet calendar | 10 | | | | | | |
| BACnet scheduler | 5 | | | | | | |
| Trend logs | 10 (130000 entries, ≈ 2 MB) | | | | | 20 (260000 entries, ≈ 4 MB) | 40 (520000 entries, ≈ 8 MB) |
| Alarm logs | 5 | | | | | | |
| Connection | Ethernet | Ethernet | Ethernet | Ethernet | Ethernet | Ethernet | Ethernet |
| 128x64 graphic display with backlight | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Ethernet switch | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | | | | | |
| Dimensions (L x W x H, mm) | 107 x 100 x 75 | | | | | | 159 x 100 x 75 |
| Certificates | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL | CE, FCC, BTL |

| Product name | L-IOB Adapter | | |
|----------------------------|--|---|---|
| Model | LIOB-A2 | LIOB-A4 | LIOB-A5 |
| |  |  |  |
| Connection | 4-wire cables | RJ-45 | Terminate the LIOB-Connect bus |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | |
| Dimensions (L x W x H, mm) | 55 x 100 x 60 | 27 x 100 x 60 | |
| Certificates | CE, FCC | CE, FCC | CE, FCC |

1. O29-O40 are internally connected to IO29-IO40 and provide 4-20 mA outputs in parallel to the 0-10 V outputs on IO29-IO40

2. Add external load: Sum of max. current drawn from all outputs x 24V

| | |
|----------------------|---|
| Product name | LOYCNV Voltage / Current Converter |
| Model | LOYCNV-VA8 |
| |  |
| Power supply | 24 V DC \pm 10 % |
| Interfaces | 8 x Analog Input (0-10 V) 8 x Analog Output (4-20 mA), burden resistance 250-500 Ohm |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) |
| Dimensions | 55 x 100 x 60 (L x W x H, mm) |
| Certificates | CE, FCC |

| | |
|----------------------|--|
| Product name | LOYCNV Voltage Converter |
| Model | LOYCNV-PT1008 |
| |  |
| Power supply | 24 V DC \pm 10 % |
| Power consumption | approx. 0.7 W |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) |
| Input | 8x PT1000 (2-wire connection) |
| Output | 8x 0 – 10 V |
| Dimensions | 55 x 100 x 60 (L x W x H, mm) |
| Certificates | CE, FCC |

| | |
|-------------------------------|--|
| Product name | Relay Interface |
| Model | LOYREL-816 |
| |  |
| Power supply | 24 V DC |
| Interfaces | 8 x Digital Output (16 A Relays) 8 x Digital Input (0/10 V), input 0 V: Relay off, Input 10 V: Relay on |
| Power consumption | up to 3.2 W |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) |
| Dimensions (L x W x H, mm) | 107 x 100 x 60 |
| Certificates | CE, FCC |

| | |
|-------------------------------|--|
| Product name | Triac Interface |
| Model | L-TRIAC16 |
| |  |
| Interfaces | 16 x Digital Output (0.5 A TRIAC), 24 V AC - 230 V AC 16 x Digital Input (0/10 V), Input 0 V: TRIAC off, Input 10 V: TRIAC on |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) |
| Dimensions (L x W x H, mm) | 107 x 100 x 60 |
| Certificates | CE, FCC |

| Product name | L-IOB I/O Controller | | | | | |
|---------------------------------------|---|---|---|--|---|---|
| Model | LIOB-585 | LIOB-586 | LIOB-587 | LIOB-588 | LIOB-589 | LIOB-590 |
| |  |  |  |  |  |  |
| BACnet device profile | B-BC | | | | | |
| Power supply | 24 VDC / 24 VAC ±10 % via L-POW, or with an external power supply | | | | | |
| CPU | A5 (500 MHz) | A5 (500 MHz) | A5 (500 MHz) | A5 (500 MHz) | A5 (500 MHz) | A5 (500 MHz) |
| RAM | 128 MByte | 128 MByte | 128 MByte | 128 MByte | 128 MByte | 128 MByte |
| FLASH | 4 GByte | 4 GByte | 4 GByte | 4 GByte | 4 GByte | 4 GByte |
| Universal Input (UI) | 6 | 6 | 6 | 10 | 10 | - |
| Digital Input (DI) | - | 4 | 4 | - | 6 | - |
| Analog Output (AO) | 2 | - | - | 6 | 6 | - |
| Digital Output (DO) | 5 (5 x TRIAC 0.5 A) | 6 (6 x Relay 10 A) | 6 (6 x Relay 10 A) | 8 (8 x Relay 8 A) | 4 (4 x Relay 8 A) | - |
| Universal I/O (IO) | - | - | - | - | - | 20 |
| Differential pressure sensor | ±500 Pa | - | - | - | - | - |
| Total number of data points | 10000 | 10000 | 10000 | 10000 | 10000 | 10000 |
| OPC data points | 5000 | 5000 | 5000 | 5000 | 5000 | 5000 |
| BACnet objects | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| BACnet calendar | 25 | 25 | 25 | 25 | 25 | 25 |
| BACnet scheduler | 10 | 10 | 10 | 10 | 10 | 10 |
| BACnet notification classes | 32 | 32 | 32 | 32 | 32 | 32 |
| Trend logs | 256 (13 000 000 entries, ≈ 200 MB) | | | | | |
| LonMark calendar | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) |
| LonMark scheduler | 10 | 10 | 10 | 10 | 10 | 10 |
| LonMark alarm servers | 1 | 1 | 1 | 1 | 1 | 1 |
| Modbus data points | 300 | 300 | 300 | 300 | 300 | 300 |
| L-WEB clients | 32 | 32 | 32 | 32 | 32 | 32 |
| L-IOB I/O modules | - | 1 x LIOB-11x or LIOB-45x/55x | 1 x LIOB-11x or LIOB-45x/55x | 1 x LIOB-11x or LIOB-45x/55x | 1 x LIOB-11x or LIOB-45x/55x | - |
| Power Measurement | - | - | ■ | - | - | - |
| Ethernet switch | ■ | ■ | ■ | ■ | ■ | ■ |
| 128x64 graphic display with backlight | ■ | ■ | ■ | ■ | ■ | ■ |
| WLAN | ■ 1 | ■ 1 | ■ 1 | ■ 1 | ■ 1 | - |
| EnOcean | ■ 1 | ■ 1 | ■ 1 | ■ 1 | ■ 1 | - |
| MP-Bus | ■ | ■ 1 | ■ 1 | ■ 1 | ■ 1 | - |
| SMI | - | - | - | - | - | - |
| LTE | ■ 1 | ■ 1 | ■ 1 | ■ 1 | ■ 1 | - |
| IoT | ■ 2 | ■ 2 | ■ 2 | ■ 2 | ■ 2 | ■ 2 |
| L-STUDIO | ■ | ■ | ■ | ■ | ■ | ■ |
| Operating conditions | 0°C to 50°C, 10–90% RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | | | | |
| Dimensions (L x W x H, mm) | 107 x 100 x 75 | 159 x 100 x 75 | 159 x 100 x 75 | 159 x 100 x 75 | 159 x 100 x 75 | 107 x 100 x 75 |
| Certificates | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL |

1. To operate these protocols, an expansion module is needed and must be ordered separately.

2. To operate IoT functionalities, the L-IOT1 software license is needed and must be ordered separately.

| Product name | L-IOB Room Controller | | L-IOB I/O Controller | | | |
|---------------------------------------|---|---|---|--|---|---|
| Model | LIOB-591 | LIOB-592 | LIOB-593 | LIOB-594 | LIOB-595 | LIOB-596 |
| |  |  |  |  |  |  |
| BACnet device profile | B-BC | | | | | |
| Power supply | 85 – 240 V AC, 50 – 60 Hz | 24 VDC / 24 V AC \pm 10 % via L-POW, or with an external power supply | | | | |
| CPU | A5 (500 MHz) | A5 (500 MHz) | A5 (500 MHz) | A5 (500 MHz) | A5 (500 MHz) | A5 (500 MHz) |
| RAM | 128 MByte | 128 MByte | 128 MByte | 128 MByte | 128 MByte | 128 MByte |
| FLASH | 4 GByte | 4 GByte | 4 GByte | 4 GByte | 4 GByte | 4 GByte |
| Universal Input (UI) | - | - | - | - | - | - |
| Digital Input (DI) | - | - | - | - | - | - |
| Analog Output (AO) | - | - | - | - | - | - |
| Digital Output (DO) | 1 x TRIAC 1250 W, 230 V AC 3 x TRIAC 300 W, 230 V AC | - | 7 (5x Relay 2A, 2x Relay 6A) | 7 (5x Relay 2A, 2x Relay 6A) | 4 (4x Relay 2A) | 6 (4x Relay 2A, 2x TRIAC 0.5A) |
| Universal I/O (IO) | 8 x Universal I/O (U, I, R), ³ 12 x Universal I/O (U) ³ | 40 ⁴ | 8 x Universal I/O (U, I, R), ³ 8 x Universal I/O (U) ³ | 8 x Universal I/O (U, I, R), ³ | 6 x Universal I/O (U, I, R), ³ | 8 x Universal I/O (U, I, R), ³ |
| Differential pressure sensor | - | - | - | - | \pm 500 Pa | - |
| Total number of data points | 10000 | 10000 | 10000 | 10000 | 10000 | 10000 |
| OPC data points | 5000 | 5000 | 5000 | 5000 | 5000 | 5000 |
| BACnet objects | 500 | 500 | 1000 | 500 | 500 | 500 |
| BACnet calendar | 25 | 25 | 25 | 25 | 25 | 25 |
| BACnet scheduler | 10 | 10 | 10 | 10 | 10 | 10 |
| BACnet notification classes | 32 | 32 | 32 | 32 | 32 | 32 |
| Trend logs | 256 (13 000 000 entries, \approx 200 MB) | | | | | |
| LonMark calendar | - | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) |
| LonMark scheduler | - | 10 | 10 | 10 | 10 | 10 |
| LonMark alarm servers | - | 1 | 1 | 1 | 1 | 1 |
| Modbus data points | 300 | 300 | 500 | 300 | 300 | 300 |
| L-WEB clients | 32 | 32 | 32 | 32 | 32 | 32 |
| L-IOB I/O modules | 1 x LIOB-45x/55x | - | - | - | - | - |
| Integrated DALI bus power supply | 16 VDC, 116 mA max. supply current | - | - | - | - | - |
| DALI channels | 1 | - | - | - | - | - |
| DALI devices | 64 | - | - | - | - | - |
| Ethernet switch | ■ | ■ | ■ | ■ | ■ | ■ |
| 128x64 graphic display with backlight | ■ | ■ | ■ | ■ | ■ | ■ |
| WLAN | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ |
| EnOcean | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ |
| MP-Bus | ■ ¹ | ■ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ |
| SMI | ■ ¹ | - | - | - | - | - |
| LTE | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ |
| IoT | ■ ² | ■ ² | ■ ² | ■ ² | ■ ² | ■ ² |
| L-STUDIO | ■ | ■ | ■ | ■ | ■ | ■ |
| Operating conditions | 0 °C to 45 °C, 10–90% RH, noncondensing, degree of protection: IP30, IP20 (terminals) | | 0 °C to 50 °C, 10–90% RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | | |
| Dimensions (L x W x H, mm) | 199 x 87 x 62 | 159 x 100 x 75 | 107 x 100 x 75 | 107 x 100 x 75 | 107 x 100 x 75 | 107 x 100 x 75 |
| Certificates | CE, FCC, BTL | CE, FCC, BTL | CE, FCC, BTL | CE, FCC, BTL | CE, FCC, BTL | CE, FCC, BTL |

1. To operate these protocols, an expansion module is needed and must be ordered separately.

2. To operate IoT functionalities, the L-IOT1 software license is needed and must be ordered separately.

3. U: 0-10V input or 0-10V output, I: 4-20 mA input, R: resistance measurement

4. O29-O40 are internally connected to IO29-IO40 and provide 4-20 mA outputs in parallel to the 0-10 V outputs on IO29-IO40

| Product name | Gateways | | | | | |
|---|--|---|---|---|---|---|
| | LGATE-952 | LGATE-902 | LINX-102 | LINX-103 | LINX-202 | LINX-203 |
| Model |  |  |  |  |  |  |
| BACnet device profile | B-BC | B-BC | - | - | B-BC | B-BC |
| Power supply | 24VDC / 24 VAC ± 10%, typ. 2.5 W | | | | | |
| CPU | Quad-core ARM Cortex-A53 @ 1.1GHz | | | | | |
| RAM/FLASH | 1 GB / 8 GB | 1 GB / 8 GB | 1 GB / 8 GB | 1 GB / 8 GB | 1 GB / 8 GB | 1 GB / 8 GB |
| LIOB-Connect | - | - | ■ | ■ | ■ | ■ |
| TP / FT-10 ports | 1 | 1 | 1 | 1 | - | - |
| RS-485 ports | 2 | 1 | 1 | 1 | 2 | 2 |
| Extension ports | 3 | 1 | 1 | 1 | 1 | 1 |
| Total number of data points | 30000 | 10000 | 10000 | 10000 | 10000 | 10000 |
| OPC data points | 5000 | 2000 | 2000 | 2000 | 2000 | 2000 |
| BACnet objects | 2000 | 2000 | - | - | 750 | 750 |
| BACnet client mappings | 1000 | 750 | - | - | 750 | 750 |
| BACnet calendar | 25 | 25 | - | - | 25 | 25 |
| BACnet scheduler | 100 | 100 | - | - | 100 | 100 |
| BACnet notification classes | 32 | 32 | - | - | 32 | 32 |
| Trend logs | 512 (13 000 000 entries, ≈ 200 MB) | | 256 (13 000 000 entries, ≈ 200 MB) | | | |
| LonMark calendar | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) | 1 (25 calendar patterns) | - | - |
| LonMark scheduler | 100 | 100 | 100 | 100 | - | - |
| LonMark alarm servers | 1 | 1 | 1 | 1 | - | - |
| L-WEB clients | 32 | 32 | 32 | 32 | 32 | 32 |
| L-IOB I/O modules | - | - | Up to 8 (LIOB-Connect, LIOB-FT and LIOB-IP852) | | Up to 8 (LIOB-Connect, LIOB-FT and LIOB-55x) | |
| IEC-61131 | - | - | - | - | - | - |
| IEC-61499 | - | - | - | - | - | - |
| CEA-709 Router | - | - | - | ■ | - | - |
| CEA-709 RNI | ■ | ■ | ■ | - | - | - |
| CEA-709 (FT) | ■ 1 | ■ 1 | ■ 1 | ■ | - | - |
| CEA-852 (IP) | ■ 1 | ■ 1 | ■ 1 | ■ | - | - |
| BACnet Router | - | - | - | - | - | ■ |
| BACnet MS / TP | ■ 2 | ■ 2 | - | - | ■ 2 | ■ |
| BACnet IP | ■ 2 | ■ 2 | - | - | ■ 2 | ■ |
| BBMD | ■ | ■ | - | - | - | ■ |
| Modbus RTU/ASCII | ■ | ■ 3 | ■ | ■ | ■ 3 | ■ 3 |
| Modbus IP | ■ | ■ | ■ | ■ | ■ | ■ |
| M-Bus | ■ 4 | ■ 4 | ■ 4 | ■ 4 | ■ 4 | ■ 4 |
| KNX TP1 | ■ 4 | ■ 4 | ■ 4 | ■ 4 | ■ 4 | ■ 4 |
| MP-BUS | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 |
| KNX IP | ■ 4 | ■ 4 | ■ | ■ | ■ | ■ |
| SMI | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 |
| EnOcean | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 |
| OPC XML-DA Client/Server | ■ | ■ | ■ | ■ | ■ | ■ |
| OPC UA Server | ■ | ■ | ■ | ■ | ■ | ■ |
| SNMP | ■ | ■ | ■ | ■ | ■ | ■ |
| 128 x 64 graphic display with backlight | ■ | ■ | ■ | ■ | ■ | ■ |
| USB | ■ | ■ | ■ | ■ | ■ | ■ |
| Ethernet switch | ■ | ■ | ■ | ■ | ■ | ■ |
| WLAN | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 |
| LTE | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 |
| IoT | ■ | ■ | ■ 6 | ■ 6 | ■ 6 | ■ 6 |
| SSH, HTTPS, Firewall | ■ | ■ | ■ | ■ | ■ | ■ |
| LIOB FT + IP | - | - | ■ | ■ | ■ | ■ |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | | | | |
| Dimensions (L x W x H, mm) | 159 x 100 x 75 | | | 107 x 100 x 75 | | |
| Certificates | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, UL | CE, FCC, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL |

1. This model can be configured to have either FT or IP active for CEA-709.

2. This model can be configured to have either MS / TP or IP active for BACnet.

3. Modbus RTU/ASCII can only be used if BACnet MS / TP is not active on this model.

4. M-Bus and KNX TP1 can be used alternatively only on this model. To operate these protocols, an expansion module is needed and must be ordered separately.

5. To operate these protocols, an expansion module is needed and must be ordered separately.

6. To operate IoT functionalities, the L-IOT1 software license is needed and must be ordered separately.

| Product name | L-VIS Touch Panels | | | | | | |
|---------------------------------------|---|---|--|---|--|---|---|
| Model | LVIS-3ME7-G1 | LVIS-3ME7-G2 | LVIS-3ME12-A1 | LVIS-3ME15-A1 | LVIS-3ME15-G1 | LVIS-3ME15-G2 | LVIS-3ME15-G3 |
| |  |  |  |  |  |  |  |
| Power supply | 24 VDC ±10%, 2.5 W Backlight on: 5 W | | 24 VDC ±10%, 4 W, Backlight on: 10 W or 85-240 VAC, 7 W @110 V, 5.9 W @230 V Backlight on: 13 @110V, 13.3 W @230V | | 24 VDC ±10%, 4.2 W, Backlight on: 9.4 W or 85-240 VAC, 5.6 W @110 V, 7 W @230 V Backlight on: 11.3 W @110 V, 13.3 W @230 V | | |
| Screen size | 7" | 7" | 12.1" | 15" | 15" | 15" | 15" |
| Touch display | Capacitive touch | Capacitive touch | Resistive touch | Resistive touch | Capacitive touch | Capacitive touch | Capacitive touch |
| Display resolution | 800 x 480 262 144 colors | 800 x 480 262 144 colors | 800 x 600 262 144 colors | 1024 x 768 262 144 colors | 1024 x 768 262 144 colors | 1024 x 768 262 144 colors | 1024 x 768 262 144 colors |
| Panel material | Frameless glass | Frameless glass | Aluminum frame with anodized finish | Aluminum frame with anodized finish | Frameless glass | Frameless glass | Frameless glass |
| Color | Silver | Black | Silver | Silver | Silver | Black | White |
| BACnet | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| CEA-709 | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| OPC XML-DA server | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| OPC XML-DA clients | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| OPC UA server | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| OPC data points | 10000 | 10000 | 10000 | 10000 | 10000 | 10000 | 10000 |
| Modbus data points | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 | 2000 |
| VNC clients | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| Alarming | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Scheduling | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Trending | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Web server | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Ethernet ports | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| TP / FT-10 ports | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| RS-485 ports (Modbus / BACnet) | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Digital Input (DI) | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Speaker and audio output | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Mounting frame | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| WLAN | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 |
| LTE | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 | ■ 5 |
| Operating conditions | 10°C to 40°C, 10-90% RH, noncondensing | | | | | | |
| Dimensions (L x W x H, mm) | 223.5 x 162 x 65 | | 329 x 268.3 x 65 | | 394 x 318 x 65 | | |
| Dimensions cut-out (L x W x H, mm) | 195 x 143 x 61 | | 300 x 250 x 61 | | 355 x 295 x 61 | | |
| Certificates | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL |

5. To operate these protocols, an expansion module is needed and must be ordered separately.

| Product name | L-STAT Room Control Unit | | | | | |
|--|---|---|---|--|---|---|
| Model LSTAT-80x-G3-Lx | LSTAT-800-G3-L1 LSTAT-801-G3-L1 LSTAT-802-G3-L1 | LSTAT-800-G3-L2 LSTAT-801-G3-L2 LSTAT-802-G3-L2 | LSTAT-800-G3-L3 LSTAT-801-G3-L3 LSTAT-802-G3-L3 | LSTAT-800-G3-L4 LSTAT-801-G3-L4 LSTAT-802-G3-L4 | LSTAT-800-G3-L5 LSTAT-801-G3-L5 LSTAT-802-G3-L5 | LSTAT-800-G3-L6 LSTAT-801-G3-L6 LSTAT-802-G3-L6 |
| Black Front, White Enclosure |  |  |  |  |  |  |
| Model LSTAT-80x-G3-L20x | LSTAT-800-G3-L201 LSTAT-801-G3-L201 LSTAT-802-G3-L201 | LSTAT-800-G3-L202 LSTAT-801-G3-L202 LSTAT-802-G3-L202 | LSTAT-800-G3-L203 LSTAT-801-G3-L203 LSTAT-802-G3-L203 | LSTAT-800-G3-L204 LSTAT-801-G3-L204 LSTAT-802-G3-L204 | LSTAT-800-G3-L205 LSTAT-801-G3-L205 LSTAT-802-G3-L205 | LSTAT-800-G3-L206 LSTAT-801-G3-L206 LSTAT-802-G3-L206 |
| White Front, White Enclosure |  |  |  |  |  |  |
| Display | LCD display with backlight and choice of RGB color | | | | | |
| RS-485 ports | 1 | 1 | 1 | 1 | 1 | 1 |
| Button | 4 | 6 | 8 | 8 | 8 | 8 |
| Power supply | 24 VDC ±10%, 1 W | | | | | |
| Buzzer | 1 | 1 | 1 | 1 | 1 | 1 |
| Internal temperature sensor | 1 | 1 | 1 | 1 | 1 | 1 |
| Internal relative humidity sensor | 1 | 1 | 1 | 1 | 1 | 1 |
| Digital Input (DI) | 3 | 3 | 3 | 3 | 3 | 3 |
| Universal Input (UI) | 1 | 1 | 1 | 1 | 1 | 1 |
| Motion detection, occupancy, Infrared receiver | 1 (LSTAT-801-GX-LX and LSTAT-802-GX-LX) | | | | | |
| CO ₂ sensor | 1 (LSTAT-802-GX-LX) | | | | | |
| EnOcean | optional for L-STAT-CUSTOM | | | | | |
| Operating conditions | 0°C to 50°C, 10–90% RH, noncondensing | | | | | |
| Dimensions (L x W x H, mm) | 94.5 x 110 x 19.5 | | | | | |
| Certificates | CE, FCC, UL | | | | | |

Buttons (capacitive touch)

LSTAT-80x-Gx-Lxx1: 4 x Button with temperature up/down, occupancy, and menu

LSTAT-80x-Gx-Lxx2: 6 x Button with temperature up/down, fan up/down, occupancy, and menu

LSTAT-80x-Gx-Lxx3: 8 x Button with temperature up/down, fan up/down, light on/off, occupancy, and menu

LSTAT-80x-Gx-Lxx4: 8 x Button with temperature up/down, sunblinds up/ down, light on/off, occupancy, and menu

LSTAT-80x-Gx-Lxx5: 8 x Button with temperature up/ down, fan up/ down, sunblinds up/ down, occupancy, and menu

LSTAT-80x-Gx-Lxx6: 8 x Button with temperature up/ down, fan up/ down, sunblinds up/ down, light, and menu

| Product name | LPAD7-7 Touch Panel | | LPAD7-7 Touch Panel / Programmable Controller | | | |
|-------------------------------------|---|---|---|--|---|---|
| | LPAD7-30G2 | LPAD7-30G3 | LPAD7-31G2 | LPAD7-31G3 | LPAD7-41G2 | LPAD7-41G3 |
| |  |  |  |  |  |  |
| | Black Front | White Front | Black Front | White Front | Black Front | White Front |
| CPU | Quad-core ARM Cortex-A53 @ 1.1GHz | | Quad-core ARM Cortex-A53 @ 1.1GHz | | Quad-core ARM Cortex-A53 @ 1.1GHz | |
| RAM | 1 GByte | | 1 GByte | | 1 GByte | |
| FLASH | 8 GByte | | 8 GByte | | 8 GByte | |
| Power supply | PoE class 3, 24 V DC $\pm 10\%$, 3 W, backlight on: 6 W | | | | | |
| Display | 7" IPS, 1024 x 600, 16.7 million colors, capacitive touch | | | | | |
| OPC XML-DA server | ■ | | ■ | | ■ | |
| OPC XML-DA clients | ■ | | ■ | | ■ | |
| OPC UA server | ■ | | ■ | | ■ | |
| OPC data points | 10000 | | 10000 | | 10000 | |
| Modbus data points | - | | 2000 | | 2000 | |
| VNC clients | 16 | | 16 | | 16 | |
| AST | ■ | | ■ | | ■ | |
| Web server | ■ | | ■ | | ■ | |
| Ethernet ports | 2 | | 2 | | 2 | |
| PoE Class 3 | ■ | | ■ | | ■ | |
| Speaker | ■ | | ■ | | ■ | |
| TOF proximity sensor | ■ | | ■ | | ■ | |
| Temperature/Humidity | ■ | | ■ | | ■ | |
| Lux sensor | ■ | | ■ | | ■ | |
| IR receiver | ■ | | ■ | | ■ | |
| Camera | - | | - | | ■ | |
| WLAN | ■ | | ■ | | ■ | |
| Bluetooth | ■ | | ■ | | ■ | |
| BACnet/IP, BACnet/SC | - | | ■ | | ■ | |
| BACnet MS/TP | - | | ■ 1 | | ■ 1 | |
| LonMark IP-852 ² | ■ 2 | | ■ 2 | | ■ 2 | |
| LonMark TP/FT-10 ² | ■ 2 | | ■ 2 | | ■ 2 | |
| Modbus TCP | - | | ■ | | ■ | |
| Modbus RTU/ASCII | - | | ■ 1 | | ■ 1 | |
| EnOcean | ■ 3 | | ■ 3 | | ■ 3 | |
| IoT, Node.js, Node-RED | - | | ■ | | ■ | |
| IEC 61499 / IEC 61131-3 programming | - | | ■ | | ■ | |
| Degree of protection | IP20 | | | | | |
| Operating conditions | +10 °C to 45 °C, 10-90 % RH, noncondensing | | | | | |
| Dimensions | 180 x 112.2 x 21 (L x W x H, mm) | | | | | |
| Certificates | CE, FCC | | CE, FCC, BTL | | CE, FCC, BTL | |

| Product name | LPAD7-SOCKETx Mounting Sockets | | | | | |
|--------------------|---|---|---|---|---|---|
| | LPAD7-SOCKET0 | LPAD7-SOCKET1 | LPAD7-SOCKET2 | LPAD7-SOCKET3 | LPAD7-SOCKET4 | LPAD7-SOCKET5 |
| |  |  |  |  |  |  |
| Power supply | 24 V DC supply | 24 V AC/DC supply | 24 V AC/DC supply | 24 V AC/DC supply | 24 V AC/DC supply | 24 V AC/DC supply |
| RS-485 | - | ■ | ■ | ■ | ■ | - |
| Universal I/O (IO) | - | 7 | - | - | - | - |
| Relays | - | 6 Relays 2 A, 24 V | - | - | - | - |
| LonMark TP/FT-10 | - | - | ■ | - | - | - |
| EnOcean | - | - | - | 868 MHz | 902 MHz | - |
| Interfaces | - | - | 3 x digital input (dry contact, not protected against overvoltage) | | | - |
| Certificates | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, EnOcean certified | CE, FCC, EnOcean certified | CE, FCC, BTL, UL |

1. Needs LPAD7-SOCKET1, LPAD7-SOCKET2, LPAD7-SOCKET3 or LPAD7-SOCKET4 - must be ordered separately.

2. Needs LPAD7-SOCKET2 - must be ordered separately.

3. Needs LPAD7-SOCKET3, or LPAD7-SOCKET4 - must be ordered separately.

| Product name | L-DALI Controller | | |
|---|--|---|---|
| Model | LDALI-3E101-U | LDALI-3E102-U | LDALI-3E104-U |
| |  |  |  |
| Power supply | 85-240 V AC, 50/60 Hz, typ. 9 W (4 W + 5 W DALI) | 85-240 V AC, 50/60 Hz, typ. 14 W (4 W + 2 x 5 W DALI) | 85-240 V AC, 50/60 Hz, typ. 14 W (4 W + 4 x 2.5 W DALI) |
| CPU | Quad-core ARM Cortex-A53 @ 1.1GHz | | |
| RAM/FLASH | 1 GB / 8 GB | 1 GB / 8 GB | 1 GB / 8 GB |
| DALI channels | 1 | 2 | 4 |
| Integrated DALI bus power supply (per channel data) | 16 VDC, 230 mA guaranteed supply current, 250 mA max. supply current | | 16 VDC, 116 mA guaranteed supply current, 125 mA max. supply current |
| OPC data points | 10000 | 10000 | 10000 |
| 128x64 graphic display with backlight | ■ | ■ | ■ |
| BACnet Server Objects | - | - | - |
| CEA-709 Local NVs | 1000 | 2000 | 4000 |
| OPCXML-DA + UA Server | ■ | ■ | ■ |
| DALI ballasts per DALI channel | 64 | | |
| DALI groups per DALI channel | 16 | | |
| DALI sensor per DALI channel | 16 | | |
| Scene control | 16 scenes per DALI group | | |
| Alarm logs | 10 | | |
| Scheduler | 16 per DALI channel (LonMark) | | |
| Trend logs | 512 (13 000 000 entries, ≈ 200 MB) | | |
| Local and Global connections | 2000 / 250 | | |
| L-WEB clients | 32 (simultaneously) | | |
| Ethernet ports | 2 | | |
| TP / FT-10 ports | 1 | | |
| BACnet MS / TP ports | - | - | - |
| WLAN | ■ 1 | ■ 1 | ■ 1 |
| LTE | ■ 1 | ■ 1 | ■ 1 |
| L-STUDIO | - | - | - |
| IoT | ■ | ■ | ■ |
| Operating conditions | 0 °C to 40 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | |
| Dimensions | 159 x 100 x 75 (L x W x H, mm) | | |
| Certificates | DALI-2, CE, FCC, UL | DALI-2, CE, FCC, UL | DALI-2, CE, FCC, UL |

| Product name | L-DALI Power Supply | | |
|--------------------------------------|--|---|---|
| Model | LDALI-PWR1-U | LDALI-PWR2-U | LDALI-PWR4-U |
| |  |  |  |
| Power supply | 85-240 VAC, 50 / 60 Hz | 85-240 VAC, 50 / 60 Hz | 85-240 VAC, 50 / 60 Hz |
| Product descriptions | DALI power supply unit for 1 DALI channels | DALI power supply unit for 2 DALI channels | DALI power supply unit for 4 DALI channels |
| Operating conditions | 0 °C to 40 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | |
| DALI supply current guaranteed / max | 1 x 50mA / 62mA | 2 x 116mA / 125mA | 4 x 116mA / 125mA |
| Dimensions | 51 x 41 x 21 (L x W x H) | 107 x 100 x 75 (L x W x H, mm) | |
| Certificates | DALI-2, CE, FCC | DALI-2, CE, FCC, UL | DALI-2, CE, FCC, UL |

1. To operate these protocols, an expansion module is needed and must be ordered separately.

| Product name | L-DALI Controller | | | | |
|---|--|---|---|---|---|
| Model | LDALI-ME201-U | LDALI-ME202-U | LDALI-ME204-U | LDALI-PLC2 | LDALI-PLC4 |
| |  |  |  |  |  |
| Power supply | 85-240 V AC, 50/60 Hz, typ. 9W (4W + 5W DALI) | 85-240 V AC, 50/60 Hz, typ. 14W (4W + 2 x 5 W) | 85-240 V AC, 50/60 Hz, typ. 14W (4W + 4 x 2.5W DALI) | 85-240 V AC, 50/60 Hz, typ. 14W (4W + 2 x 5W DALI) | 85-240 V AC, 50/60 Hz, typ. 14W (4W + 4 x 2.5W DALI) |
| CPU | Quad-core ARM Cortex-A53 @ 1.1GHz | | | | |
| RAM/FLASH | 1 GB / 8 GB | 1 GB / 8 GB | 1 GB / 8 GB | 1 GB / 8 GB | 1 GB / 8 GB |
| DALI channels | 1 | 2 | 4 | 2 | 4 |
| Integrated DALI bus power supply (per channel data) | 16 VDC, 230 mA guaranteed supply current, 250 mA max. supply current | 16 VDC, 230 mA guaranteed supply current, 250 mA max. supply current | 16 VDC, 116 mA guaranteed supply current, 125 mA max. supply current | 16 V DC, 230 mA guaranteed supply current, 250 mA max. supply current | 16 V DC, 116 mA guaranteed supply current, 125 mA max. supply current |
| OPC data points | 10000 | 10000 | 10000 | 10000 | 10000 |
| 128x64 graphic display with backlight | ■ | ■ | ■ | ■ | ■ |
| BACnet Server Objects | 1000 | 2000 | 4000 | 2000 | 2000 |
| CEA-709 Local NVs | - | - | - | 1000 | 1000 |
| OPCXML-DA + UA Server | ■ | ■ | ■ | ■ | ■ |
| DALI ballasts per DALI channel | 64 | | | | |
| DALI groups per DALI channel | 16 | | | | |
| DALI sensor per DALI channel | 16 | | | | |
| Scene control | 16 scenes per DALI group | | | | |
| Alarm logs | 10 | | | | |
| Scheduler | 25 per DALI channel (BACnet) | | | 25 per DALI channel (LonMark), 25 per DALI channel (BACnet) | |
| Trend logs | 512 (13 000 000 entries, ≈ 200 MB) | | | | |
| Local and Global connections | 2000 / 250 | | | | |
| L-WEB clients | 32 (simultaneously) | | | | |
| Ethernet ports | 2 | | | | |
| TP / FT-10 ports | - | | | 1 | 1 |
| BACnet MS / TP ports | 1 | 1 | 1 | 1 | 1 |
| WLAN | ■ 1 | ■ 1 | ■ 1 | ■ 1 | ■ 1 |
| LTE | ■ 1 | ■ 1 | ■ 1 | ■ 1 | ■ 1 |
| L-STUDIO | - | - | - | ■ | ■ |
| IoT | ■ | ■ | ■ | ■ | ■ |
| Operating conditions | 0 °C to 40 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | | | |
| Dimensions | 159 x 100 x 75 (L x W x H, mm) | | | | |
| Certificates | DALI-2, CE, FCC, BTL, UL | DALI-2, CE, FCC, BTL, UL | DALI-2, CE, FCC, BTL, UL | DALI-2, CE, FCC, BTL, UL | DALI-2, CE, FCC, BTL, UL |

| Product name | L-DALI Phase-Cut Dimmer Module |
|----------------------|---|
| Model | LDALI-PD1 |
| |  |
| Power supply | 220-240 V AC, 50/60Hz |
| Product descriptions | DALI phase-cut dimmer module |
| Number of devices | 64 per DALI channel, with sufficient dimensioned DALI bus power supply |
| Operating conditions | 0°C – 50°C, 10 – 90% RH, non-condensing, degree of protection: IP20 |
| Dimensions (mm) | 51 x 41 x 21 |
| Certificates | DALI-2, CE, FCC |

1. To operate these protocols, an expansion module is needed and must be ordered separately.

| Product name | L-DALI Multisensors | | |
|----------------------------------|--|---|--|
| Model | LDALI-MS2-BT | LDALI-MS3-BT | LDALI-MS4-BT |
| |  |  |  |
| Power supply | DALI bus, typ. 3 mA/6 mA at 16V DC (Bluetooth disabled/enabled), max. 10 mA (inrush current) | | |
| Product descriptions | Multi-sensor with motion detection, lux level measurements and Bluetooth | | Multi-sensor with motion detection, lux level measurements, flat lense and Bluetooth |
| Dimensions (mm) | Total Ø: 104 flush-mounted Ø: 60 mounting depth: 30 | Total Ø: 68 mounting hole Ø: 60 mounting depth: 42 | |
| Installation | Ceiling mount: • Direct installation in false ceilings (spring mount included) • Flush-mounted installation • On-wall (mounting kit LOYMS2-OW must be ordered separately) | | Ceiling mount: • Direct installation in false ceilings (spring mount included) |
| Number of LDALI-MSx-BT | 16 per DALI channel, with sufficient dimensioned DALI bus power supply | | |
| Lux level measurement | 0 – 4000 lux, resolution: 0.125 lux | | |
| Mounting height | max. 12 m | | max. 5 m |
| Passive infrared motion detector | 10.8 m @ 3m mounting height (92m ²), 136 zones, opening angle: 122° (up to 5 m mounting height) Highbay-application: 5 m – 12 m mounting height, detection area: 256 m ² (opening angle: 73.6° @ 12 m, 122° @ 5 m) | | 7.2 m @ 3 m mounting height (44 m ²), 156 zones, opening angle: 100° (up to 5 m mounting height) |
| Bluetooth | ■ | ■ | ■ |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP20 | | |
| Certificates | DALI-2, CE, FCC | DALI-2, CE, FCC | DALI-2, CE, FCC |

| Product name | Infrared Remote controller |
|----------------------|---|
| Model | L-RC1 |
| |  |
| Power supply | 1 x CR2025 3.0 V button battery |
| Product descriptions | Infrared remote control for room automation applications |
| Keys | 18 |
| Operating conditions | 0°C to 40°C, 10–90% RH, noncondensing |
| Dimensions | 40.5 x 86.4 x 7.20 (L x W x H, mm) |
| Certificates | CE, FCC |

| Product name | L-DALI Pushbutton Coupler |
|----------------------|---|
| Model | LDALI-BM2 |
| |  |
| Power supply | DALI bus 3.5 mA at 16 V DC, max. 6 mA (inrush current) |
| Product descriptions | Quadruple pushbutton coupler |
| Number of devices | 64 per DALI channel, with sufficient dimensioned DALI bus power supply |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP20 |
| Dimensions | 45.8 x 37.8 x 13.5 (L x W x H, mm) |
| Certificates | DALI-2, CE, FCC |

| Product name | L-DALI PWM module | | |
|----------------------|---|---|---|
| Model | LDALI-PWM4 | LDALI-PWM4-TC | LDALI-PWM4-RGBW |
| |  |  |  |
| Power supply | 12 - 24V DC +10% | | |
| Product descriptions | PWM module, DALI, 4 x 3 A LED outputs, 24 V DC ext. | PWM module tunable white, DALI, 4 x 3 A LED outputs, 24 V DC ext. | PWM module RGBW, DALI, 4 x 3 A LED outputs, 24 V DC ext. |
| Number of devices | up to 16 per DALI channel | up to 32 per DALI channel | up to 64 per DALI channel |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP20 | | |
| Dimensions (mm) | 51 x 41 x 21 | | |
| Certificates | DALI-2, CE, FCC | DALI-2, CE, FCC | CE, FCC |

| Product name | L-DALI Sunblind Module | |
|---------------------------------|--|--|
| Model | LOY-DALI-SBM1 | |
| |  | |
| Power supply | DALI-bus, idle 3.5 mA (@16 V DC) / typ. 6 mA (@ 16 V DC) / max. 11 mA inrush current | |
| Product descriptions | DALI Sunblind Module, DALI, 2 x 6A/250 V AC | |
| Number of devices | 64 per DALI channel, with sufficient dimensioned DALI bus power supply | |
| Maximum switching power | 1500 VA @ 250 V AC / 180 W @ 30 V DC | |
| Nominal switching capacity | 6A @ 250 V AC / 6A @ 30 V DC / inrush currents up to 10A | |
| Relay contact switching voltage | 250 V AC / 30 V DC | |
| Interfaces | 1 x DALI, protected against overvoltage (mains) | |
| Interval times | Relay-Mode (operating mode 0x00): min. switching interval: 200 ms Sunblind-Mode (operating mode 0x80, factory default): min. switching interval: 200 ms switch-on duration: 70 ms - 161840 ms resolution: 10 ms | |
| Dimensions (mm) | 51 x 41 x 21 | |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | |
| Certificates | DALI-2, CE, FCC | |

| Product name | L-DALI Relay module | | |
|---------------------------------|---|---|--|
| Model | LDALI-RM5 | LDALI-RM6 | LDALI-RM8 |
| |  |  |  |
| Power supply | DALI bus, idle 3.5 mA / 3 mA (1-10 V connected / not connected) (@16 V DC), typ. 6 mA (@16 V DC), max. 11 mA (inrush current) | | 85 – 240 V AC or 24 V DC ±10 %, typ. consumption: < 1 W |
| Product descriptions | DALI Relay Module 10 A, Analog Interface 1 – 10 V | | DALI Relay Module, 8-channel |
| Number of devices | 64 per DALI channel, with sufficient dimensioned DALI bus power supply | | max. 8 per DALI channel |
| Current AC | 10 A, 120 V AC; 10 A, 120 V AC; 8 A, 277 V AC; 6 A, 347 V AC | | 16 A |
| Current DC | 10 A, 30 V DC | | 16 A, 30 V DC |
| Relay contact switching voltage | 120 - 347 V AC / 30 V DC | | 120-277 V AC / 30 V DC |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP20 | | 0 °C to 40 °C, 10 – 90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) |
| Dimensions | 51 x 41 x 21 (L x W x H, mm) | | 159 x 100 x 75 (L x W x H, mm) |
| Certificates | DALI-2, CE, FCC | | DALI-2, CE, FCC |

| Product name | L-IP CEA-709 / IP-852 Router | | | | L-IP BACnet IP Router | | |
|----------------------------|--|---|---|---|---|---|---|
| Model | LIP-3ECTC | LIP-1ECTC | LIP-33ECTC | LIP-3333ECTC | LIP-ME201C | LIP-ME202C | LIP-ME204C |
| |  |  |  |  |  |  |  |
| Power supply | 24 V AC / DC ±10% | | | | | | |
| CPU | Quad-core ARM Cortex-A53 @ 1.1GHz | | | | | | |
| RAM/FLASH | 1 GB / 8 GB | | | | | | |
| OPC XML-DA server | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| OPC UA server | ■ | ■ | ■ | ■ | ■ | ■ | ■ |
| Ethernet ports | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| TP / FT-10 ports | 1 | - | 2 | 4 | - | - | - |
| TP / XF-1250 ports | - | 1 | - | - | - | - | - |
| BACnet MS / TP ports | - | - | - | - | 1 | 2 | 4 |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | | | | | |
| Dimensions (L x W x H, mm) | 107 x 100 x 60 | | 159 x 100 x 75 | | 107 x 100 x 75 | | 159 x 100 x 75 |
| Certificates | CE, FCC, UL | CE, FCC, UL | CE, FCC, UL | CE, FCC, UL | CE, FCC, BTL, UL | CE, FCC, BTL, UL | CE, FCC, UL |
| USB ports | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| WLAN | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ |
| LTE | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ | ■ ¹ |

| Product name | NIC for CEA-709 and IP-852 Channels | | | | |
|----------------------------|---|--|---|---|---|
| Model | NIC852 | NIC709-USB100 | NIC709-IP3E100C | NIC709-IP1E100C | NIC852-SW |
| |  |  |  |  |  |
| Power supply | USB interface | USB interface | 24 V AC / DC ±10% | | - |
| CPU | - | - | Quad-core ARM Cortex-A53 @ 1.1GHz | | - |
| RAM/FLASH | - | - | 1 GB / 8 GB | | - |
| Product description | Floating license via USB hardlock key | USB interface, connects to the USB port of a PC | Remote Network Interface (RNI) | | Software license for one PC, connect to IP-852 channel |
| Ethernet ports | - | - | 2 | 2 | - |
| TP / FT-10 ports | - | 1 | 1 | - | - |
| TP / XF-1250 ports | - | 1 | - | 1 | - |
| RS-485 ports | - | 1 | - | - | - |
| USB ports | 1 | 1 | 2 | 2 | - |
| SNMP | - | - | ■ | ■ | - |
| WLAN | - | - | ■ ¹ | ■ ¹ | - |
| Operating System | Windows 10, Windows Server 2012, Windows Server 2016, Windows Server 2019 | | | | |
| Operating conditions | - | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | | - |
| Dimensions (L x W x H, mm) | - | 120 x 70 x 23 | 107 x 100 x 75 | 107 x 100 x 75 | - |
| Certificates | CE, FCC | CE, FCC | CE, FCC | CE, FCC | - |

| Product name | LPA CEA-709 Protocol Analyzer | | | | |
|---------------------|--|--|--|---|---|
| Model | LPA-SET-USB | LPA-IP | LPA-SW | LPA-IP-SW | LPA-USB |
| |  | | | | |
| Product description | Set contains: Network interface NIC709-USB100 and NIC852 for IP-852 / CEA-709 channels, registered to NIC852 / NIC709-USB100 | IP-852 Channel Protocol Analyzer bundle contains: Network interface NIC852 for IP-852 channels, registered to NIC852 | Protocol Analyzer Software, supports all NIC-709 network interfaces, NIC709 not included | Protocol Analyzer Software for IP-852 channels, supports Remote LPA. NIC852 not included. | Set contains: Network Interface NIC709-USB100 LPA-SW Protocol Analyzer Software for CEA-709 channels, registered to NIC709-USB100 |
| Operating System | Windows 7, Windows 8, Windows 10, Windows Server 2003 (32-bit), Windows Server 2008, Windows Server 2012, Windows Server 2016, Windows Server 2019 | | | | |

1. To operate these protocols, an expansion module is needed and must be ordered separately.

| Product name | M-Bus Interface | |
|----------------------------|--|---|
| Model | L-MBUS20 | L-MBUS80 |
| |  |  |
| Power supply | 24 V AC / DC ±10% | |
| Baud rate | 300 to 9600 baud | 300 to 9600 baud |
| TTL / RS-232 | 1 | 1 |
| M-Bus | 1 | 1 |
| M-Bus devices | Up to 20 | Up to 80 |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | |
| Dimensions (L x W x H, mm) | 107 x 100 x 60 | |
| Certificates | CE, FCC | CE, FCC |

| Product name | EnOcean Interface | | |
|----------------------------|--|---|---|
| Model | LENO-800 | LENO-801 | LENO-802 |
| |  |  |  |
| Power supply | Via the USB 2.0 BUS Connection | | |
| Frequency | 868.3 MHz | 902.875 MHz | 928.35 MHz |
| Installation | Standard USB 2.0 cable, max 5 M | | |
| Data rate | 125 kbit/s | | |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | | |
| Versions | Europe | USA / Canada | Japan |
| Dimensions (L x W x H, mm) | 27 x 89 x 60 | | |
| Certificates | CE, FCC | CE, FCC | CE, FCC |

| Product name | Wireless LAN Interface |
|----------------------------|--|
| Model | LWLAN-800 |
| |  |
| Power supply | via the USB 2.0 bus connection |
| Installation | standard USB 2.0 cable, max 5 M |
| USA (FCC) | 2.412~2.462 GHz / 11 channels |
| Europe (ETSI) | 2.412~2.472 GHz / 13 channels |
| Japan | 2.412~2.472 GHz / 13 channels |
| Frequency | 2.4 GHz band |
| Standard | IEEE 802.11 b/g/n |
| RF output power | max. 18 dBm (63 mW) ±2 dBm |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) |
| Dimensions (L x W x H, mm) | 27 x 89 x 60 |
| Certificates | CE, FCC, IC |

| Product name | LTE Interface |
|----------------------------|--|
| Model | LTE-800 |
| |  |
| Power supply | 24 V DC, typ 4.5 W |
| Installation | standard USB 2.0 cable, max 5 M |
| Standard | LTE, UMTS/HSPA+ and GSM/GPRS/EDGE |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) |
| Dimensions (L x W x H, mm) | 55 x 100 x 60 |
| Certificates | CE, FCC |

| Product name | Standard Motor Interface, SMI | |
|----------------------------|--|---|
| Model | LSMI-800 | LSMI-804 |
| |  |  |
| Product description | Standard Motor Interface for 16 motors via EXT port | Standard Motor Interface for 64 motors, 4 SMI channels via USB |
| Power supply | 230 VAC, 50 Hz, max 2 W | 85-240 VAC, 50/60 Hz, max 2W |
| Installation | 3-wire cable, max 1 M | standard USB 2.0 cable, max 1 M |
| Digital Output (DO) | - | 4 x Relay, 10 A |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) | |
| Dimensions (L x W x H, mm) | 55 x 100 x 60 | 107 x 100 x 60 |
| Certificates | CE, FCC | |

| Product name | KNX TP1 Interface |
|-------------------------------|--|
| Model | LKNX-300 |
| |  |
| Power supply | via KNX TP1 bus |
| Baud rate | 9600 baud |
| Installation | 3-wire cable, max 1 M |
| EXT ports | 1 |
| KNX TP1 ports | 1 |
| Number of KNX TP1 data points | 1000 |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) |
| Dimensions (L x W x H, mm) | 55 x 100 x 60 |
| Certificates | CE, FCC |

| Product name | MP-Bus Interface |
|----------------------------|--|
| Model | LMPBUS-804 |
| |  |
| Power supply | 24 V DC |
| Interfaces | 1 x Mini USB 2.0 Type B |
| MP-Bus | 4 |
| Operating conditions | 0 °C to 50 °C, 10–90 % RH, noncondensing, degree of protection: IP40, IP20 (terminals) |
| Dimensions (L x W x H, mm) | 55 x 100 x 60 |
| Certificates | CE, FCC |

| Product name | Network Terminator | | | | |
|----------------------------|---|---|---|---|---|
| Model | LT-03 | LT-13 | LT-33 | LT-04 | LT-B4 |
| |  |  |  |  |  |
| Power supply | - | - | - | - | 24 VDC or 24 VAC ±10% |
| RJ-45 ports | 1 | - | - | 1 | - |
| TP / FT-10 ports | 1 | 1 | 2 | - | - |
| TP / XF-1250 ports | - | 1 | - | - | - |
| RS-485 | - | - | - | 1 | 1 |
| Operating conditions | 0°C to 50°C, 10–90% RH, noncondensing | | | | |
| Dimensions (L x W x H, mm) | 27 x 89 x 60 | | | | |
| Certificates | CE, FCC | CE, FCC | CE, FCC | CE, FCC | CE, FCC |

RS-485 standard: ANSI/TIA/EIA-485

| Product name | L-POW Power Supply | | |
|----------------------------|---|---|---|
| Model | LPOW-2415A | LPOW-2415B | LPOW-2460B |
| |  |  |  |
| Input voltage | 85–240 VAC, 50–60 Hz | | |
| Supply voltage | 24 V DC 15 W | 24 V DC 15 W | 24 V DC 60 W |
| Connection | via LIOB-Connect | Connector | Connector |
| Dimensions (L x W x H, mm) | 55 x 100 x 60 | | 71 x 91 x 55 |
| Certificates | CE, FCC, UL | | CE, FCC |

| Product name | System Distribution Box | | |
|----------------------------|---|---|---|
| Model | LBOX-600 | LBOX-ROC1 | LBOX-ROC2 |
| |  |  |  |
| Material | Galvanized steel | | |
| Application | Room automation components | System distribution box for LROC-40x Room Controller | |
| Dimensions (L x W x H, mm) | 600 x 250 x 82 | 519 x 280 x 71 | |
| Input voltage | - | 100 – 240 VAC, 50 – 60 Hz | |
| Supply voltage | - | 24 VDC 60 W | |

| Product name | L-ACT Actuators | | |
|----------------------------|---|---|---|
| Model | L-ACT101-MP | L-ACT101-MP | L-ACT-FRAME1 |
| |  |  |  |
| Dimensions (L x W x H, mm) | 116 x 66 x 63 | 116 x 66 x 63 | 214 x 68 x 118 |
| Shaft diameter (inches) | 5/8" | 3/4" | - |
| Certificates | CE, FCC, UL | | |

| Product name | Ethernet Switch | |
|----------------------------|---|---|
| Model | LOYDVS-110W02-3SFP Managed 10-Port Ethernet Switch | LOYDVS-008I00 Unmanaged 8-Port Fast Ethernet |
| |  |  |
| Dimensions (L x W x H, mm) | 75 x 108.7 x 145.3 (L x W x H) | |
| Installation | Industrial DIN-Rail and wall mounting | |
| Certificates | CE, FCC, UL | |


| | | |
|----------------------------|---|---|
| Product name | DVP Modbus I/O Extension | |
| Model | LOYDVP16SM11N I/O Extension Module | LOYRTU-485 Remote I/O Communication Module |
| |  |  |
| Dimensions (L x W x H, mm) | 25.2 x 60 x 96 (L x W x H) | 25.2 x 60 x 96 (L x W x H) |
| Installation | Industrial DIN-Rail and wall mounting | Industrial DIN-Rail and wall mounting |
| Certificates | CE, FCC, UL | |

| | | |
|--------------------------------|---|--|
| Product name | Indoor air quality sensor | |
| Model | LOYUNO-L | |
| |  | |
| Dimensions (mm) | 141.91 x 42 x 67.91 (L x W x H) | |
| Installation | Drywall mount, Electrical box mount, wall mount cradle | |
| Power supply | source 1: 12-24 VDC, 24 VAC source 2: power adapter 12V/1A 6W max. (12VDC) | |
| Bluetooth & RF-characteristics | Maximum output power: 0 dBm Frequency range: 2402-2480 MHz | |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH | |
| Interfaces | Modbus RTU / BACnet MS/TP (Select via DIP switch) | |
| Certificates | CE, FCC, UL | |
| For use with | Bluetooth Mesh enabled LOYTEC devices (e.g. LPAD-7) | |

| | | |
|----------------------|--|--|
| Product name | LOYBT Temperature Sensor | |
| Model | LOYBT-TEMP1 | |
| |  | |
| Power supply | Battery powered (CR2032), expected battery life time: 2 years | |
| Product descriptions | Bluetooth Mesh temperature sensor | |
| Interfaces | 1x Bluetooth Mesh (low power node) 1x Button (digital input) 1x Led (optical feedback) | |
| Installation | Wall mounted (screw or adhesive tape) | |
| Dimensions (mm) | 30 x 13 (Ø x H) | |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH, noncondensing, degree of protection: IP20 | |
| For use with | Bluetooth Mesh enabled LOYTEC devices (e.g. LPAD-7) | |

Soluções inteligentes para automação de Edifícios

totalmente integrado - perfeitamente conectado - com segurança em rede

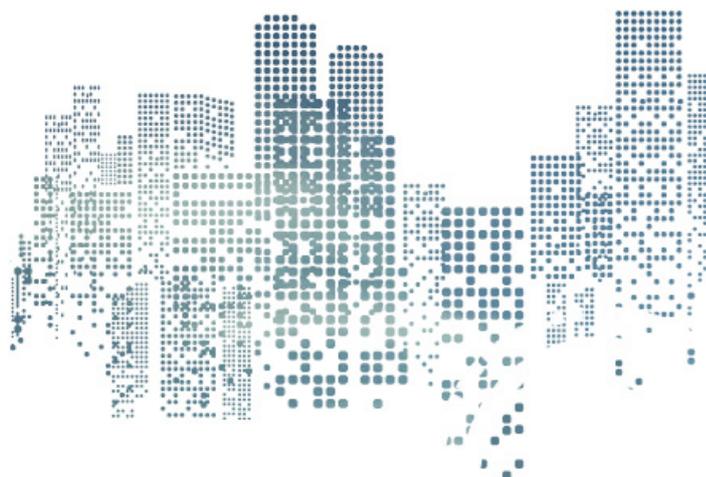

Nos nossos dias a automação de edifícios é caracterizada pela integração de múltiplos sistemas e o uso das sinergias resultantes.

A habilidade de maximizar a eficiência energética enquanto se maximiza a flexibilidade e o conforto, é primordial para os edifícios de hoje. A transparência em consumo energético e custo são requisitos para detetar imediatamente qualquer debilidade e desenvolver ativamente processos de melhoria.

LOYTEC estabelece o objetivo de transformar esses requisitos nas melhores soluções de produto possíveis. O resultado é um portfólio de produtos inovadores, consistentes e coordenados. Deste modo LOYTEC confia em protocolos de comunicação abertos enfatizando em comunicação via Ethernet/IP e WLAN/IP para assegurar uma ligação fácil à Intranet/Internet. LOYTEC foca-se em standards internacionais ISO 16484-5 (BACnet), ISO/IEC 14908-1 (LON), ISO/IEC 14543 (KNX), IEC 62386 2014 (DALI), e OPC, ainda suporta, EnOcean (wireless), M-Bus (medição), MP-Bus (Belimo) e Modbus.

LOYTEC oferecerá sempre a melhor qualidade, desenho e desenvolvimento do BMS LWEB-900, dado que constitui a base da gestão técnica num edifício ou em grupos de edifícios.

A mais alta eficiência energética e a gestão transparente de instalações técnicas de edifícios requer sistemas de automação integrados de forma simples.

Especialmente aquecimento, ventilação, ar condicionado, luminosidade e proteção solar são essenciais. Os LOYTEC L-INX Automation Servers e L-ROC Room Controllers são capazes de gerir e integrar o sub-sistema correspondente de formas altamente eficientes.



LOYTEC electronics GmbH
Blumengasse 35
1170 Vienna
Austria

www.loytec.com
info@loytec.com

Delta Electronics (Americas), Inc.
LOYTEC
Building Automation Business Group
N27 W23957 Paul Road, Suite 103
Pewaukee, WI 53072, USA
www.loytec-americas.com
info@loytec-americas.com

Delta Electronics, Inc.
256 Yangguang Street
Neihu District,
Taipei 114067
Taiwan
www.deltaww.com
bas.sales@deltaww.com

AST, LC3020, L-Chip, L-Core, L-DALI, L-ENO, L-GATE, L-INX, L-IOB, LIOB-AIR, LIOB-Connect, LIOB-FT, L-IOT, L-IP, L-KNX, L-MBUS, L-MPBUS, L-OPC, LPA, L-POW, L-Proxy, L-ROC, L-SMI, L-PAD, L-STAT, L-STUDIO, L-Switch^{XP}, L-TE, L-Term, L-VIS, L-WEB, L-WLAN, ORION Stack, Smart Auto-Connect, buildings under control are trademarks of LOYTEC electronics GmbH.

Echelon, LON, LONWORKS, LNS, LonMaker, and Neuron are trademarks of Echelon Corporation registered in the United States and other countries. LonMark and the LonMark Logo are registered trademarks owned by LonMark International. BACnet is a registered trade mark of the American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE). KNX Association cvba is the owner of the worldwide standard for Home and Building Control: KNX and also the owner of the KNX trademark logo worldwide. DiiA, DALI and DALI-2 logos are registered trademarks of the Digital Illumination Interface Alliance. EnOcean[®] and the EnOcean logo are registered trademarks of EnOcean GmbH.

Other trademarks and trade names used in this document refer either to the entities claiming the markets and names, or to their products. LOYTEC disclaims proprietary interest in the markets and names of others.

Statements in this report that relate to future results and events are based on the company's current expectations. Actual results in future periods may differ materially from those currently expected or desired because of a number of risks and uncertainties.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of LOYTEC. Product specifications, availability, and design are subject to change without prior notice.

Photos: Marco Liotta, gyn9037/Shutterstock.com, chombosan/Shutterstock.com

©2024

04022114